

LORO COPPER BRANCH 45 DEGREE DN 70/70

LORO-X branch copper 45 degrees DN 70/70

Kuvaus

LORO-N branch, made of copper, in accordance with DIN 1754/1786, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, 45 degrees, DN70




Tuotetiedot

EAN-koodi	4038088034484
ETIM-luokka	EC003025
Nimellishalkaisija	DN 70, DN 70
Nimellispituus/-aste	45
Ulkomitat (KxLxS)	84 x 1904 x 255 mm
Paino	1,10 Kg (STK)
Tuoteryhmä	1
Tullitariffin numero	74121000
Materiaali / Väri	Kupfer, Kupfer

Käyttöohje

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

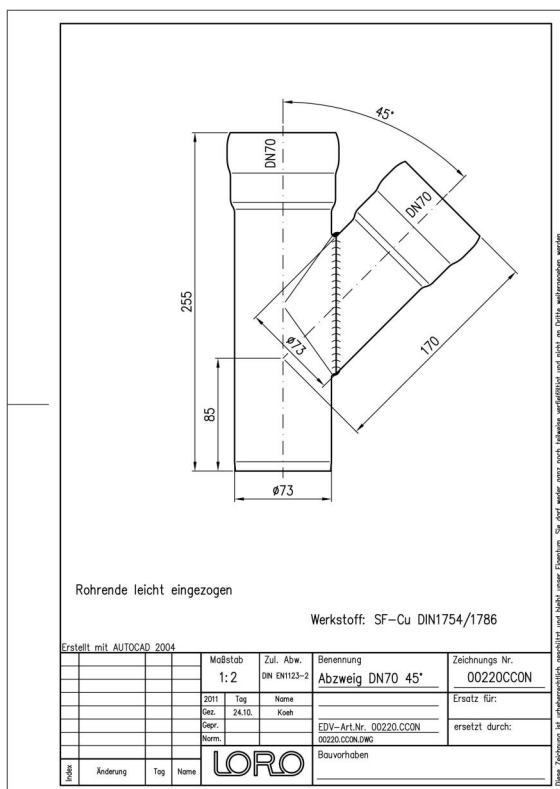

Lataukset



Alles online

[Asennusohje \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametrisk\)](#)

[Mittapiirustus \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)

[Esite \(PDF\)](#)

[BIM 3D \(STEP\)](#)