

LORO COPPER BRANCH 45 DEGREE DN 70/70

LORO-X branch copper 45 degrees DN 70/70

Opis

LORO-N branch, made of copper, in accordance with DIN 1754/1786, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, 45 degrees, DN70




Podatki o izdelku

EAN koda	4038088034484
ETIM razred	EC003025
Nazivni premer	DN 70, DN 70
Nazivna dolžina/stopinja	45
Zunanje mere (VxŠxD)	84 x 1904 x 255 mm
Teža	1,10 Kg (STK)
Skupina izdelkov	1
Carinska tarifna številka	74121000
Material / Barva	Kupfer, Kupfer

Opomba za uporabo

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

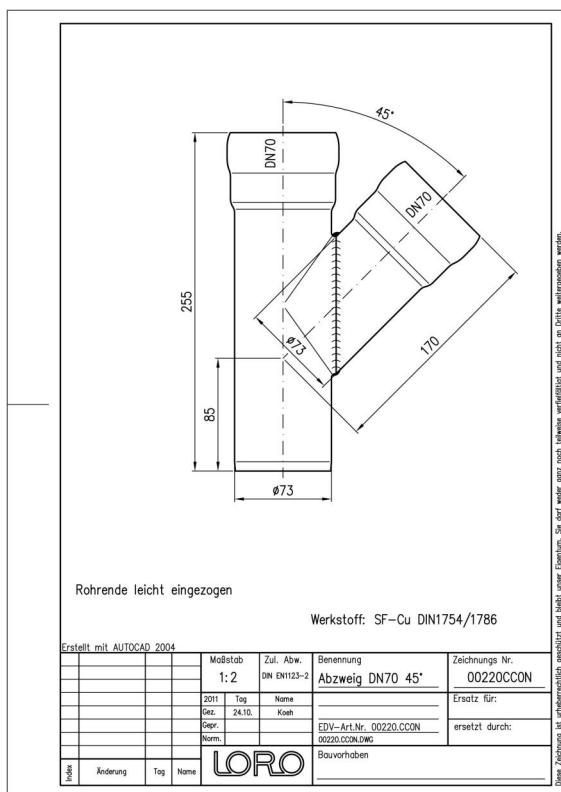

Prenosi



Alles online

[Navodila za vgradnjo \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametrisch\)](#)

[Merska risba \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)

[Prospekt \(PDF\)](#)

[BIM 3D \(STEP\)](#)