

LORO COPPER BRANCH 45 DEGREE DN 70/70

LORO-X branch copper 45 degrees DN 70/70

Popis

LORO-N branch, made of copper, in accordance with DIN 1754/1786, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, 45 degrees, DN70




Údaje o artikli

EAN kód	4038088034484
ETIM trieda	EC003025
Menovitý priemer	DN 70, DN 70
Menovitá dĺžka/stupeň	45
Vonkajšie rozmery (VxŠxH)	84 x 1904 x 255 mm
Hmotnosť	1,10 Kg (STK)
Skupina produktov	1
Colný sadzobník	74121000
Materiál / Farba	Kupfer, Kupfer

Pokyny na použitie

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

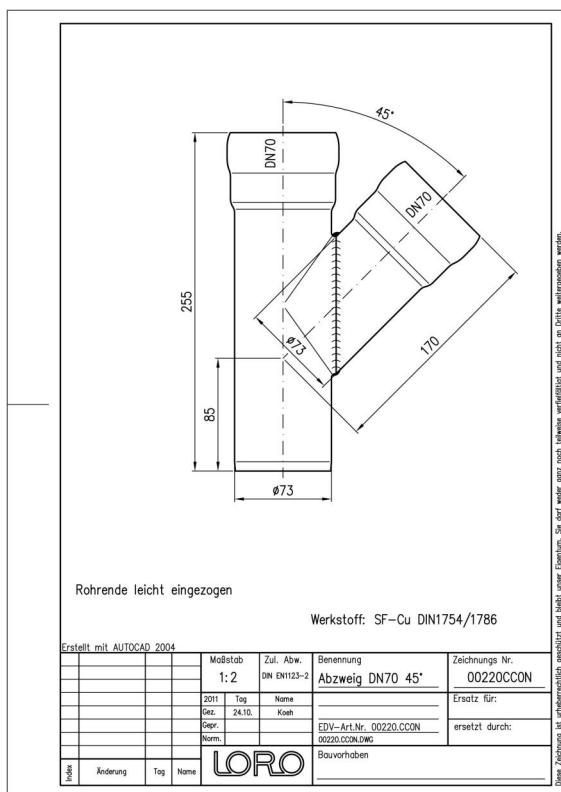

Na stiahnutie



Alles online

[Návod na montáž \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[BIM IFC4 \(parametrisch\)](#)

[Rozmerový výkres \(PDF\)](#)
[CAD 3D \(DWG\)](#)
[BIM 3D \(IFC\)](#)

[Prospekt \(PDF\)](#)
[BIM 3D \(STEP\)](#)