

## LORO COPPER BRANCH 45 DEGREE DN 70/70

LORO-X branch copper 45 degrees DN 70/70

### Descrição

LORO-N branch, made of copper, in accordance with DIN 1754/1786, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, 45 degrees, DN70



### Dados do artigo

Código EAN 4038088034484

Classe ETIM EC003025

Diâmetro nominal DN 70, DN 70

Comprimento/grau nominal 45

Medidas exteriores (AxLxP) 84 x 1904 x 255 mm

Peso 1,10 Kg (STK)


Grupo de produtos 1

Número de pauta aduaneira 74121000

Material / Cor Kupfer, Kupfer

### Nota de utilização

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

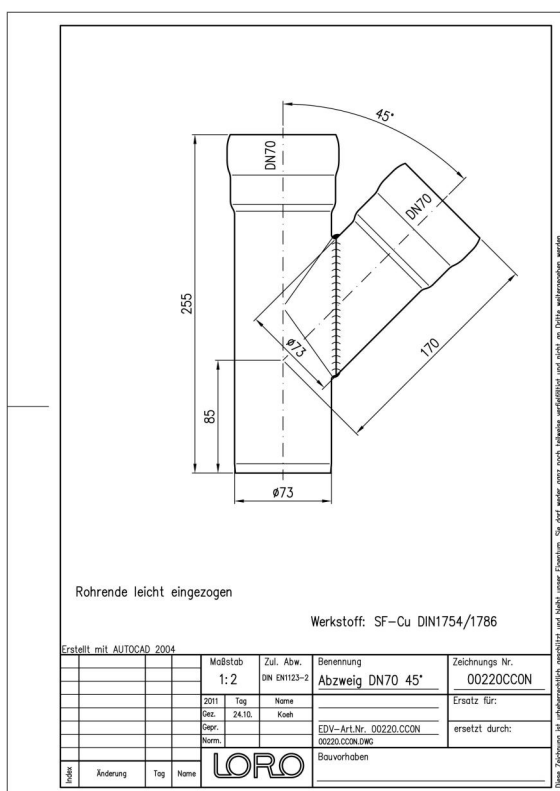

### Transferências



Alles online

[Instruções de instalação \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametrisch\)](#)

[Desenho cotado \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)

[Brochura \(PDF\)](#)

[BIM 3D \(STEP\)](#)