


LORO COPPER BRANCH 45 DEGREE DN 70/70

LORO-X branch copper 45 degrees DN 70/70

Opis

LORO-N branch, made of copper, in accordance with DIN 1754/1786, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, 45 degrees, DN70

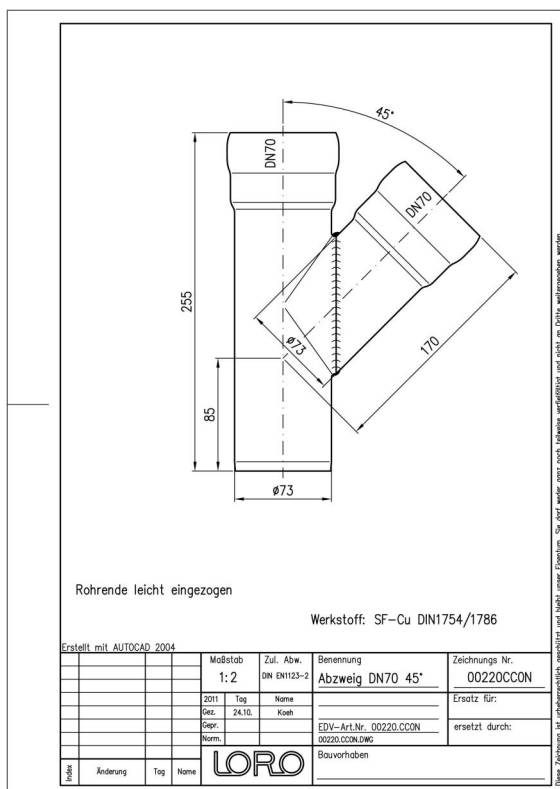

Dane artykułu

Kod EAN	4038088034484
Klasa ETIM	EC003025
Średnica nominalna	DN 70, DN 70
Długość/stożek nominalny	45
Wymiary zewnętrzne (WxSxD)	84 x 1904 x 255 mm
Waga	1,10 Kg (STK)
Grupa produktów	1
Numer taryfy celnej	74121000
Materiał / Kolor	Kupfer, Kupfer

Wskazówki dotyczące użytkowania

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

Pobieranie



Alles online

[Instrukcja montażu \(PDF\)](#)

CAD 2D (DXF)

BIM IFC4 (parametrisch)

[Rysunek wymiarowy \(PDF\)](#)

CAD 3D (DWG)

BIM 3D (IFC)

[Broszura \(PDF\)](#)

BIM 3D (STEP)