


LORO COPPER BRANCH 45 DEGREE DN 70/70

LORO-X branch copper 45 degrees DN 70/70

Beskrivelse

LORO-N branch, made of copper, in accordance with DIN 1754/1786, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, 45 degrees, DN70

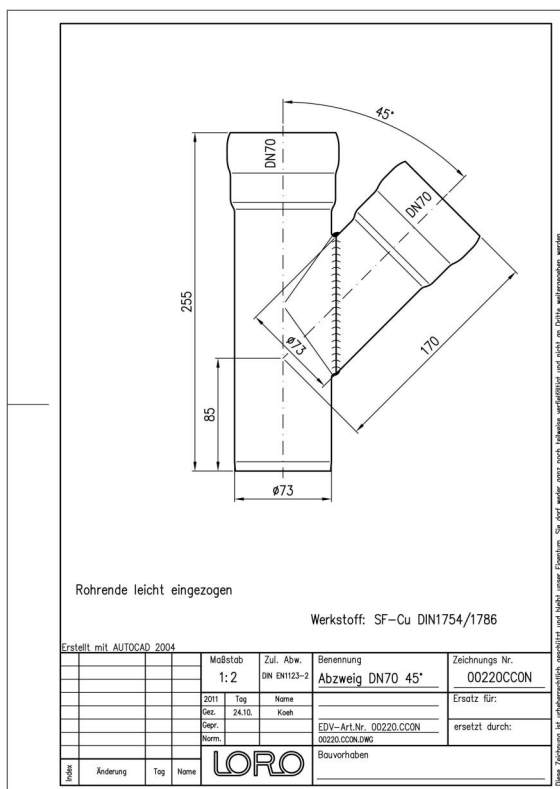

Artikkeldata

EAN-kode	4038088034484
ETIM-klasse	EC003025
Nominell diameter	DN 70, DN 70
Nominell lengde/grad	45
Utvendige mål (HxBxL)	84 x 1904 x 255 mm
Vekt	1,10 Kg (STK)
Produktgruppe	1
Tolltariffnummer	74121000
Materiale / Farge	Kupfer, Kupfer

Bruksanvisning

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

Nedlastinger



Alles online

[Monteringsanvisning \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametrisk\)](#)

[Måltegning \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)

[Brosjyre \(PDF\)](#)

[BIM 3D \(STEP\)](#)