

LORO-X BRANCH 45 DEGREE DN 70/70

LORO-X branch 45 degrees DN 70/70

Opis

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN70




Dane artykułu

Kod EAN	4038088013526
Klasa ETIM	EC003025
Średnica nominalna	DN 70, DN 70
Długość/stożek nominalny	45
Wymiary zewnętrzne (WxSxD)	84 x 191 x 190 mm
Waga	1,16 Kg (STK)
Grupa produktów	1
Numer taryfy celnej	73089098
Materiał / Kolor	Stahl feuerverzinkt, Silber

Wskazówki dotyczące użytkowania

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

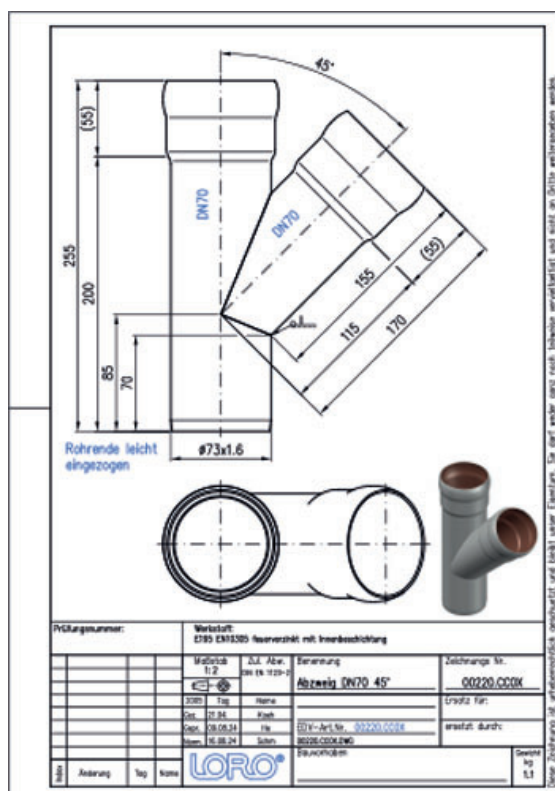

Pobieranie



Alles online

[Instrukcja montażu \(PDF\)](#)

[Certyfikat \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[BIM Revit \(RFA\)](#)

[Rysunek wymiarowy \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametrisch\)](#)

[Broszura \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)