


LORO COPPER BRANCH 45 DEGREE DN 100/100

LORO-X branch copper 45 degrees DN 100/100

Popis

LORO-N branch, made of copper, in accordance with DIN 1754/1786, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, 45 degrees, DN100

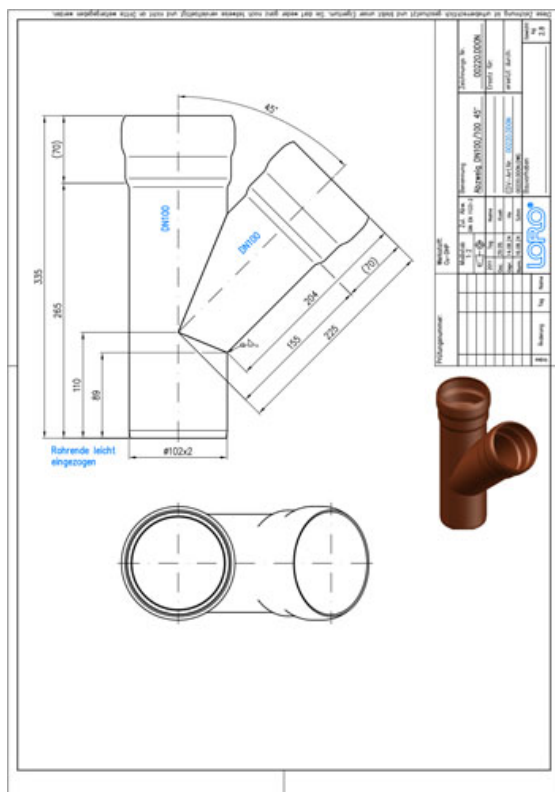

Údaje o artikli

EAN kód	4038088034507
ETIM trieda	EC003025
Menovitý priemer	DN 100, DN 100
Menovitá dĺžka/stupeň	45
Vonkajšie rozmery (VxŠxH)	118 x 257 x 355 mm
Hmotnosť	2,70 Kg (STK)
Skupina produktov	1
Colný sadzobník	74121000
Materiál / Farba	Kupfer, Kupfer

Pokyny na použitie

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

Na stiahnutie



Alles online

[Návod na montáž \(PDF\)](#)

CAD 2D (DXF)

BIM IFC4 (parametrisch)

[Rozmerový výkres \(PDF\)](#)

CAD 3D (DWG)

BIM 3D (IFC)

[Prospekt \(PDF\)](#)

BIM 3D (STEP)