


LORO COPPER BRANCH 45 DEGREE DN 100/100

LORO-X branch copper 45 degrees DN 100/100

Description

LORO-N branch, made of copper, in accordance with DIN 1754/1786, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, 45 degrees, DN100

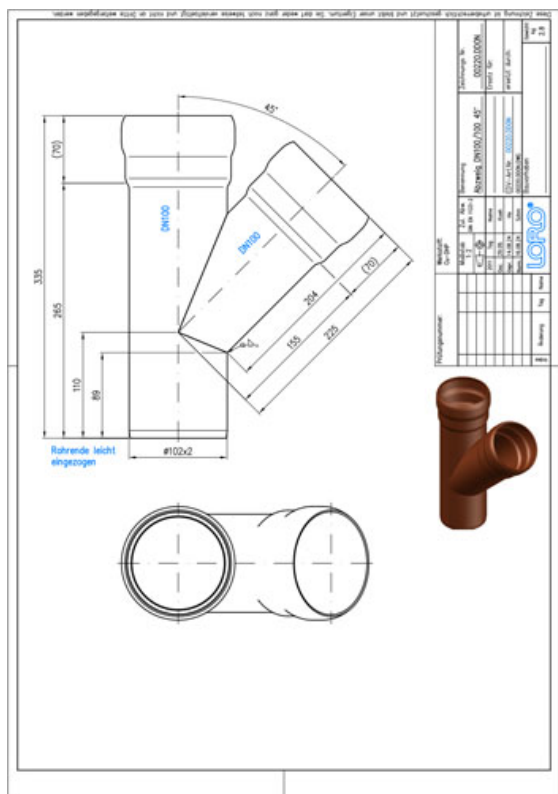

Données de l'article

Code EAN	4038088034507
Classe ETIM	EC003025
Diamètre nominal	DN 100, DN 100
Longueur/degré nominal	45
Dimensions extérieures (HxLxP)	118 x 257 x 355 mm
Poids	2,70 Kg (STK)
Groupe de produits	1
Numéro tarifaire douanier	74121000
Matériau / Couleur	Kupfer, Kupfer

Note d'utilisation

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

Téléchargements



Alles online

[Notice d'installation \(PDF\)](#)

CAD 2D (DXF)

BIM IFC4 (parametrisch)

[Dessin dimensionnel \(PDF\)](#)

CAD 3D (DWG)

BIM 3D (IFC)

[Brochure \(PDF\)](#)

BIM 3D (STEP)