


## LORO-X BRANCH 45 DEGREE DN 100/100

LORO-X branch 45 degrees DN 100/100

### Description

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN100

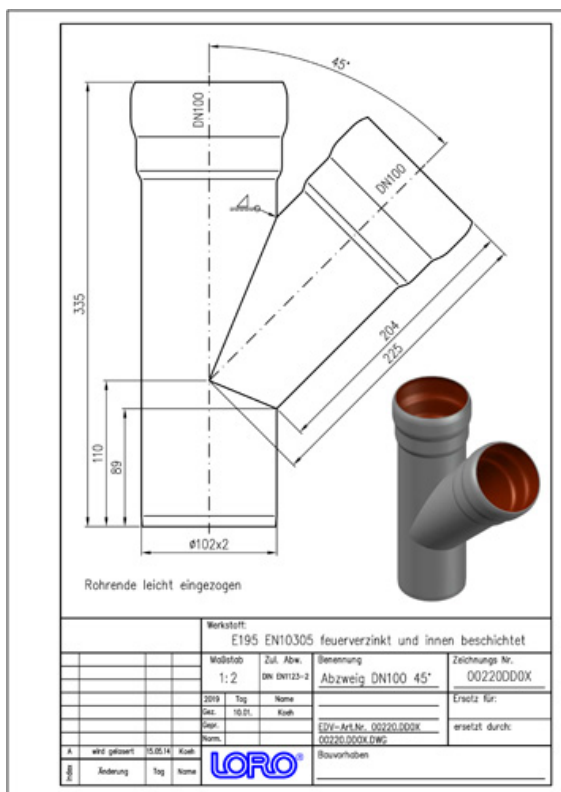

### Données de l'article

|                                |                             |
|--------------------------------|-----------------------------|
| Code EAN                       | 4038088013533               |
| Classe ETIM                    | EC003025                    |
| Diamètre nominal               | DN 100, DN 100              |
| Longueur/degré nominal         | 45                          |
| Dimensions extérieures (HxLxP) | 118 x 258 x 355 mm          |
| Poids                          | 2,80 Kg (STK)               |
| Groupe de produits             | 1                           |
| Numéro tarifaire douanier      | 73089098                    |
| Matériau / Couleur             | Stahl feuerverzinkt, Silber |

### Note d'utilisation

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

### Téléchargements



Alles online

[Notice d'installation \(PDF\)](#)

[Certificat \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[BIM Revit \(RFA\)](#)

[Dessin dimensionnel \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(paramétrisch\)](#)

[Brochure \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)