


## LORO-X BRANCH 45 DEGREE DN 150/150

LORO-X branch 45 degrees DN 150/150

### Description

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN150

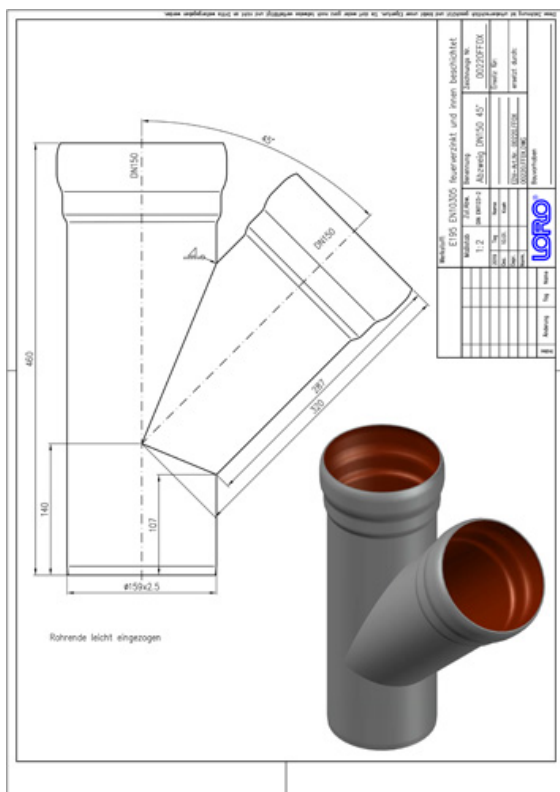

### Article information

|                              |                             |
|------------------------------|-----------------------------|
| EAN Code                     | 4038088013557               |
| ETIM Class                   | EC003025                    |
| Nominal diameter             | DN 150, DN 150              |
| Nominal length/degree        | 45                          |
| Outside measurements (HxWxL) | 181 x 378 x 460 mm          |
| Weight                       | 7,50 Kg (STK)               |
| Product group                | 1                           |
| Customs tariff number        | 73089098                    |
| Material / Color             | Stahl feuerverzinkt, Silber |

### Usage note

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

### Downloads



Alles online

[Installation \(PDF\)](#)  
[Certificate \(PDF\)](#)  
[BIM 3D \(STEP\)](#)  
[BIM Revit \(RFA\)](#)

[CAD drawing \(PDF\)](#)  
[CAD 2D \(DXF\)](#)  
[BIM IFC4 \(parametrisch\)](#)

[Brochure \(PDF\)](#)  
[CAD 3D \(DWG\)](#)  
[BIM 3D \(IFC\)](#)