LORO-X BRANCH 45 DEGREE DN 150/150

LORO-X branch 45 degrees DN 150/150

Opis

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN150

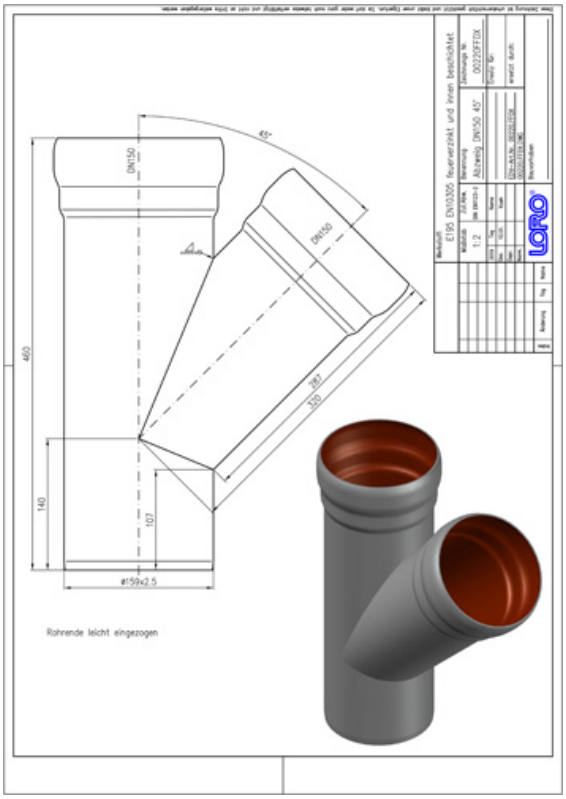

Podatki o izdelku

EAN koda	**4038088013557**
ETIM razred	**EC003025**
Nazivni premer	**DN 150, DN 150**
Nazivna dolžina/stopinja	**45**
Zunanje mere (VxŠxD)	**181 x 378 x 460 mm**
Teža	**7,50 Kg (STK)**
Skupina izdelkov	**1**
Carinska tarifna številka	**73089098**
Material / Barva	**Stahl feuerverzinkt, Silber**

Opomba za uporabo

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

Prenosi

Alles online

Navodila za vgradnjo (PDF)
Certifikat (PDF)
BIM 3D (STEP)
BIM Revit (RFA)
Merska risba (PDF)
CAD 2D (DXF)
BIM IFC4 (parametrisch)
Prospekt (PDF)
CAD 3D (DWG)
BIM 3D (IFC)