LORO-X BRANCH 45 DEGREE DN 150/150

LORO-X branch 45 degrees DN 150/150

Beskrivelse

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN150

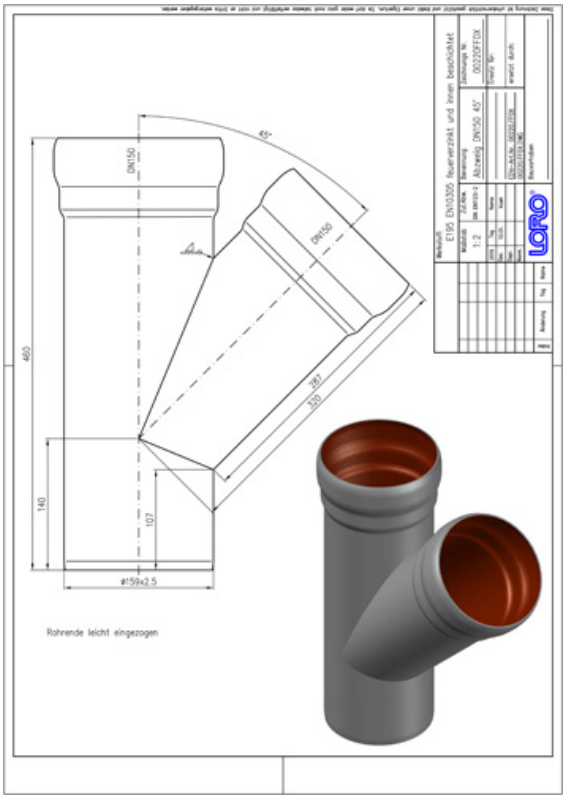

Artikkeldata

EAN-kode	**4038088013557**
ETIM-klasse	**EC003025**
Nominell diameter	**DN 150, DN 150**
Nominell lengde/grad	**45**
Utvendige mål (HxBxL)	**181 x 378 x 460 mm**
Vekt	**7,50 Kg (STK)**
Produktgruppe	**1**
Tolltariffnummer	**73089098**
Materiale / Farge	**Stahl feuerverzinkt, Silber**

Bruksanvisning

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

Nedlastinger

Alles online

- Monteringsanvisning (PDF)
- Godkjenning (PDF)
- BIM 3D (STEP)
- BIM Revit (RFA)
- Måltegning (PDF)
- CAD 2D (DXF)
- BIM IFC4 (parametrisch)
- Brosjyre (PDF)
- CAD 3D (DWG)
- BIM 3D (IFC)