## LORO-X BRANCH 45 DEGREE DN 200/200

**LORO-X branch 45 degrees DN 200/200**

### Beskrivning

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN200

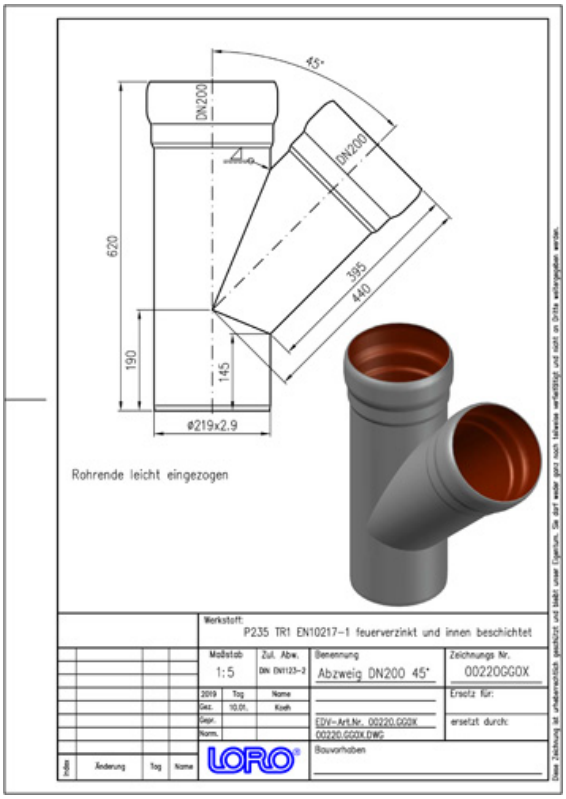


### Artikeldata

| | |
|---|---|
| EAN-kod | **4038088013564** |
| ETIM-klass | **EC003025** |
| Nominell diameter | **DN 200, DN 200** |
| Nominell längd/grad | **45** |
| Yttermått (HxBxL) | **247 x 518 x 620 mm** |
| Vikt | **13,10 Kg (STK)** |
| Produktgrupp | **1** |
| Tullnummer | **73089098** |
| Material / Färg | **Stahl feuerverzinkt, Silber** |

### Användningsanvisning

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

### Nedladdningar

Alles online

- Monteringsanvisning (PDF)
- Godkännande (PDF)
- BIM 3D (STEP)
- Måttritning (PDF)
- CAD 2D (DXF)
- BIM IFC4 (parametrisch)
- Broschyr (PDF)
- CAD 3D (DWG)
- BIM 3D (IFC)