


## LORO-X BRANCH 45 DEGREE DN 32/32

### LORO-X branch 45 degrees DN 32/32

#### Beskrivelse

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN32

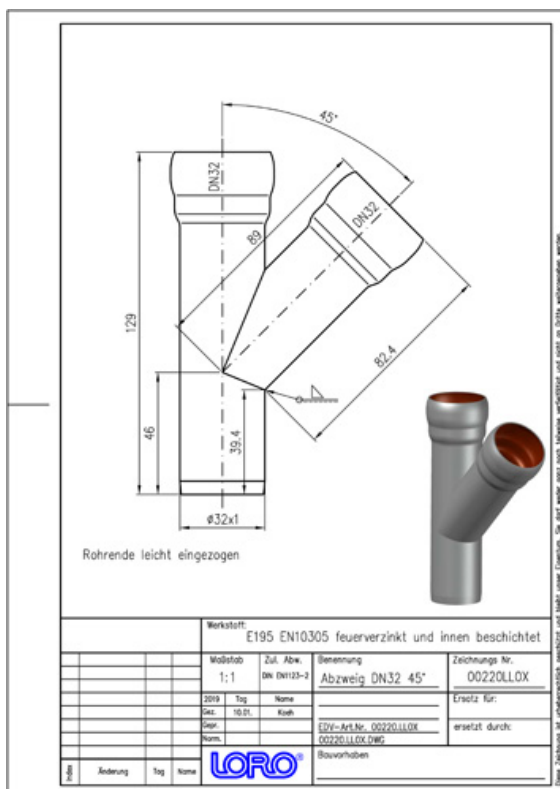

#### Artikeldata

|                     |                             |
|---------------------|-----------------------------|
| EAN-kode            | 4038088013595               |
| ETIM Klasse         | EC003025                    |
| Nominel diameter    | DN 32, DN 32                |
| Nominel længde/grad | 45                          |
| Ydermål (HxBxL)     | 39 x 89 x 110 mm            |
| Vægt                | 0,20 Kg (STK)               |
| Produktgruppe       | 1                           |
| Toldtarifnummer     | 73089098                    |
| Materiale / Farve   | Stahl feuerverzinkt, Silber |

#### Brugsanvisning

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

#### Downloads



Alles online

[Installationsvejledning \(PDF\)](#)
[Certifikat \(PDF\)](#)
[BIM IFC4 \(parametrisk\)](#)
[Måltegning \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[Brochure \(PDF\)](#)
[CAD \(DWG\)](#)