

LORO COPPER BRANCH 45 DEGREE DN 80/80

LORO-X branch copper 45 degrees DN 80/80

Beskrivning

LORO-N branch, made of copper, in accordance with DIN 1754/1786, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, 45 degrees, DN 80




Artikeldata

EAN-kod	4038088034491
ETIM-klass	EC003025
Nominell diameter	DN 80, DN 80
Nominell längd/grad	45
Yttermått (HxBxL)	103 x 226 x 295 mm
Vikt	1,50 Kg (STK)
Produktgrupp	1
Tullnummer	74121000
Material / Färg	Kupfer, Kupfer

Användningsanvisning

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

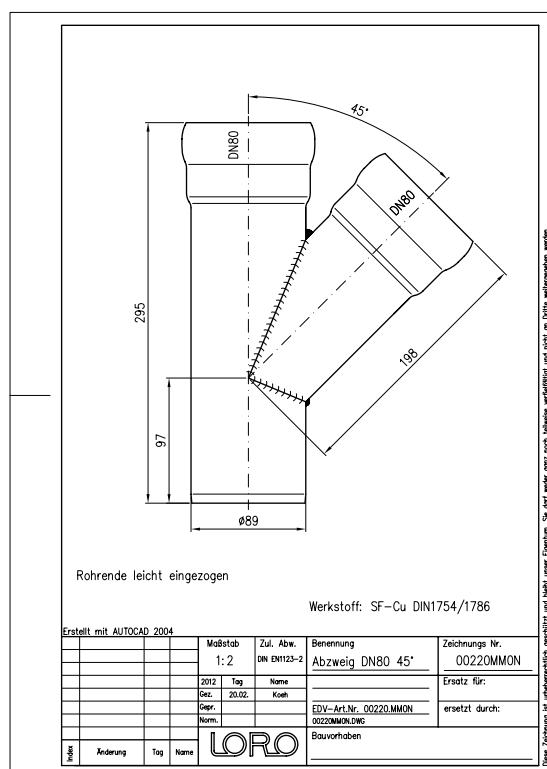

Nedladdningar



Alles online

[Monteringsanvisning \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Måttitning \(PDF\)](#)

[CAD \(DWG\)](#)

[Broschyr \(PDF\)](#)

[BIM IFC4 \(parametrisk\)](#)