

LORO COPPER BRANCH 45 DEGREE DN 80/80

LORO-X branch copper 45 degrees DN 80/80

Popis

LORO-N branch, made of copper, in accordance with DIN 1754/1786, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, 45 degrees, DN 80



Údaje o artikli

EAN kód 4038088034491

ETIM trieda EC003025

Menovitý priemer DN 80, DN 80

Menovitá dĺžka/stupeň 45

Vonkajšie rozmery (VxŠxH) 103 x 226 x 295 mm

Hmotnosť 1,50 Kg (STK)


Skupina produktov 1

Colný sadzobník 74121000

Materiál / Farba Kupfer, Kupfer

Pokyny na použitie

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

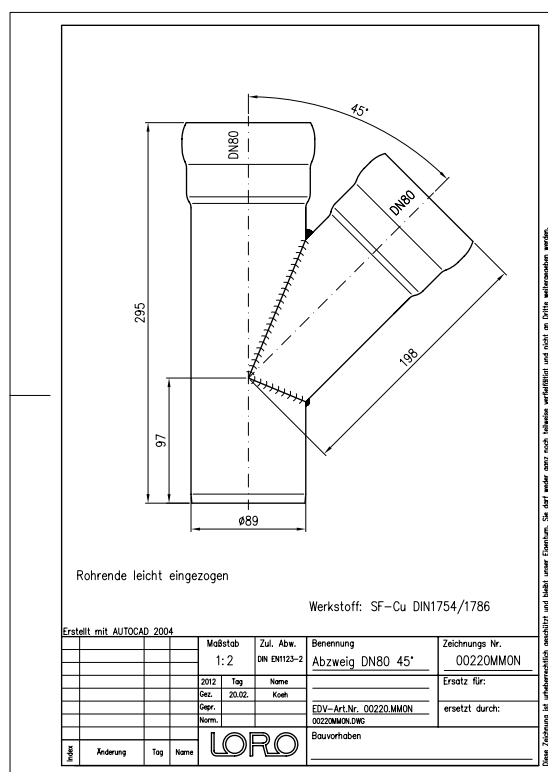

Na stiahnutie



Alles online

[Návod na montáž \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Rozmerový výkres \(PDF\)](#)

[CAD \(DWG\)](#)

[Prospekt \(PDF\)](#)

[BIM IFC4 \(parametrisch\)](#)