

## LORO COPPER BRANCH 45 DEGREE DN 80/80

LORO-X branch copper 45 degrees DN 80/80

### Description

LORO-N branch, made of copper, in accordance with DIN 1754/1786, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, 45 degrees, DN 80




### Données de l'article

|                                |                    |
|--------------------------------|--------------------|
| Code EAN                       | 4038088034491      |
| Classe ETIM                    | EC003025           |
| Diamètre nominal               | DN 80, DN 80       |
| Longueur/degré nominal         | 45                 |
| Dimensions extérieures (HxLxP) | 103 x 226 x 295 mm |
| Poids                          | 1,50 Kg (STK)      |
| Groupe de produits             | 1                  |
| Numéro tarifaire douanier      | 74121000           |
| Matériau / Couleur             | Kupfer, Kupfer     |

### Note d'utilisation

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

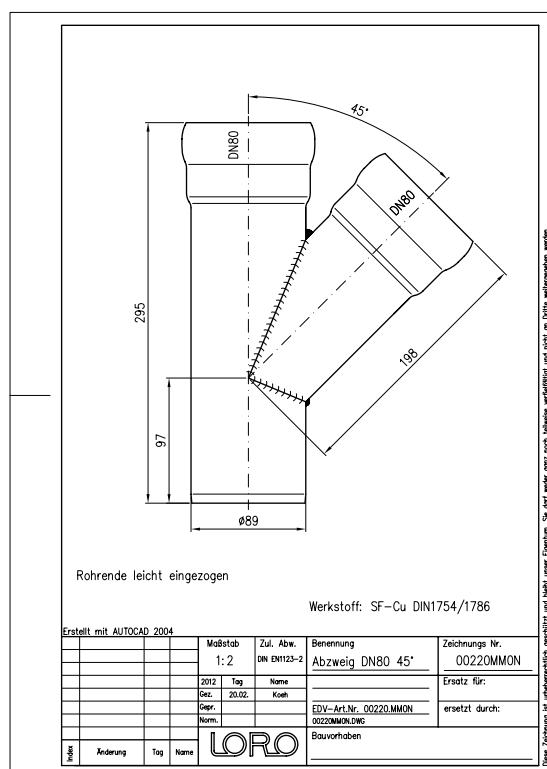

### Téléchargements



Alles online

[Notice d'installation \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Dessin dimensionnel \(PDF\)](#)

[CAD \(DWG\)](#)

[Brochure \(PDF\)](#)

[BIM IFC4 \(paramétrisch\)](#)