LORO-X BRANCH 45 DEGREE DN 80/80

LORO-X branch 45 degrees DN 80/80

Opis

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN 80

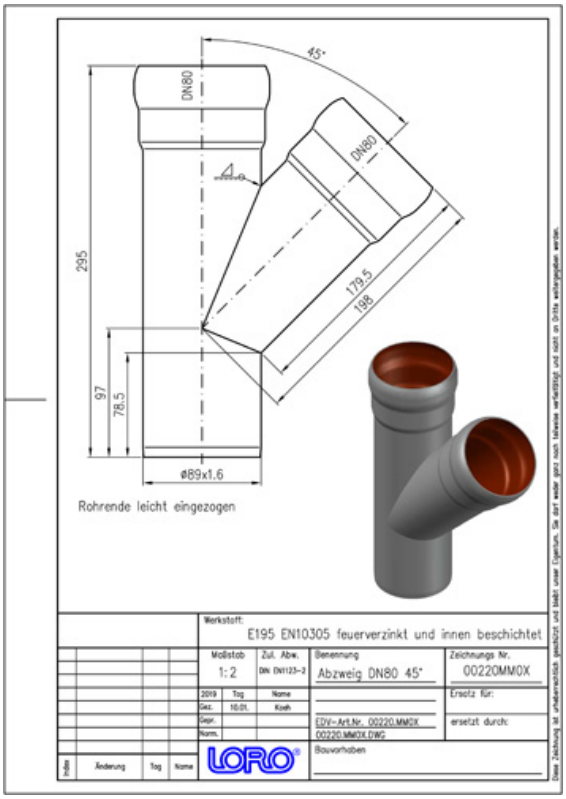

Podaci o artiklu

EAN kod	**4038088013601**
ETIM klasa	**EC003025**
Nazivni promjer	**DN 80, DN 80**
Nazivna duljina/stupanj	**45**
Vanjske mjere (VxŠxD)	**102 x 225 x 295 mm**
Težina	**1,80 Kg (STK)**
Grupa proizvoda	**1**
Carinski tarifni broj	**73089098**
Materijal / Boja	**Stahl feuerverzinkt, Silber**

Napomena za upotrebu

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

Preuzimanja

Alles online

Upute za ugradnju (PDF)
Dimenzijski crtež (PDF)
Prospekt (PDF)
Certifikat (PDF)
CAD 2D (DXF)
CAD 3D (DWG)
BIM 3D (STEP)
BIM IFC4 (parametrisch)
BIM 3D (IFC)