LX-RED-ABZWEIG O. IB 87 GRAD DN100/50

LORO-X reducing branch without insinde coating 87 degrees DN 100/50

Kiírási szöveg

LORO-X reducing branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, without inside coating, 87 degrees, DN100/50



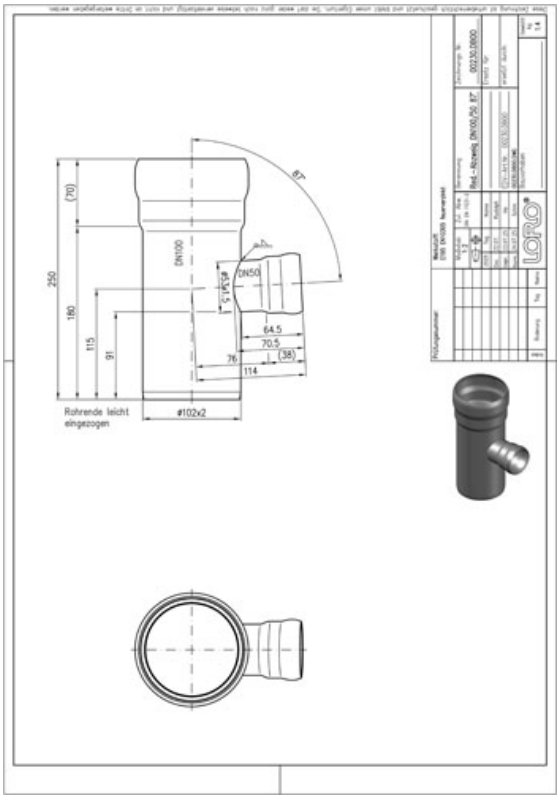

Cikkadatok

EAN kód	4038088109854
ETIM osztály	EC003025
Névleges átmérő	DN 100, DN 50
Névleges hossz/fok	87
Külső méretek (MxSzxH)	118 x 175 x 250 mm
Súly	1,50 Kg (STK)
Termékcsoport	1
Vámtarifaszám	73063012
Anyag / Szín	Stahl feuerverzinkt, Silber

Használati megjegyzés

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

Letöltések

Alles online

Szerelési útmutató (PDF)
Engedély (PDF)
BIM 3D (STEP)
Méretrajz (PDF)
CAD 2D (DXF)
BIM 3D (IFC)
Prospektus (PDF)
CAD 3D (DWG)