



LX-RED-ABZWEIG O. IB 87 GRAD DN100/50

LORO-X reducing branch without inside coating 87 degrees DN 100/50

Tekst za troškovnik

LORO-X reducing branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, without inside coating, 87 degrees, DN100/50

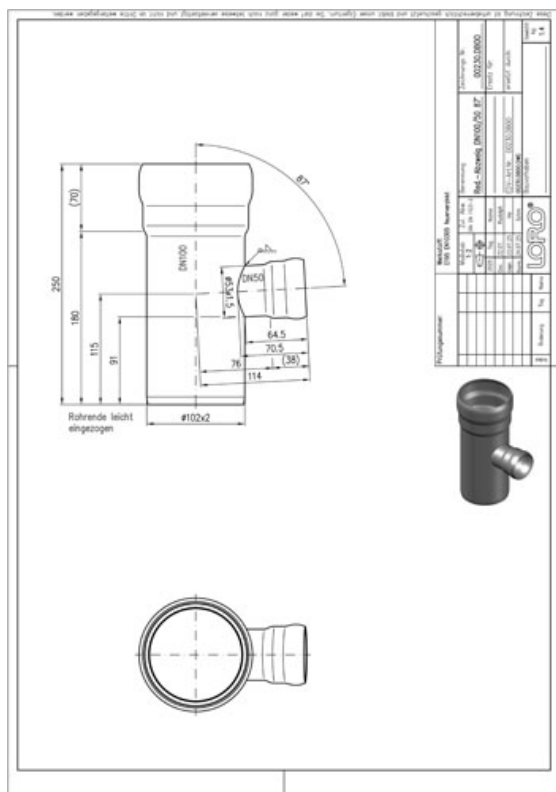

Podaci o artiklu

EAN kod	4038088109854
ETIM klasa	EC003025
Nazivni promjer	DN 100, DN 50
Nazivna duljina/stupanj	87
Vanjske mjere (VxŠxD)	118 x 175 x 250 mm
Težina	1,50 Kg (STK)
Grupa proizvoda	1
Carinski tarifni broj	73063012
Materijal / Boja	Stahl feuerverzinkt, Silber

Napomena za upotrebu

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

Preuzimanja



Alles online

[Upute za ugradnju \(PDF\)](#)

[Certifikat \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Dimenzijski crtež \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Prospekt \(PDF\)](#)

[CAD 3D \(DWG\)](#)