



LX-RED-ABZWEIG O. IB 87 GRAD DN100/50

LORO-X reducing branch without inside coating 87 degrees DN 100/50

Texto para caderno de encargos

LORO-X reducing branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, without inside coating, 87 degrees, DN100/50

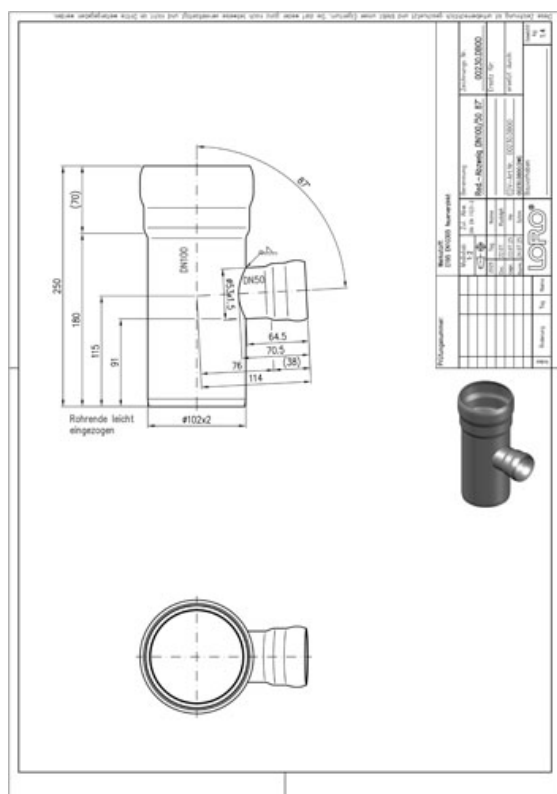

Dados do artigo

Código EAN	4038088109854
Classe ETIM	EC003025
Diâmetro nominal	DN 100, DN 50
Comprimento/grau nominal	87
Medidas exteriores (AxLxP)	118 x 175 x 250 mm
Peso	1,50 Kg (STK)
Grupo de produtos	1
Número de pauta aduaneira	73063012
Material / Cor	Stahl feuerverzinkt, Silber

Nota de utilização

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

Transferências



Alles online

[Instruções de instalação \(PDF\)](#)

[Homologação \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Desenho cotado \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Brochura \(PDF\)](#)

[CAD 3D \(DWG\)](#)