



LX-RED-ABZWEIG O. IB 87 GRAD DN100/50

LORO-X reducing branch without inside coating 87 degrees DN 100/50

Tekst przetargowy

LORO-X reducing branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, without inside coating, 87 degrees, DN100/50

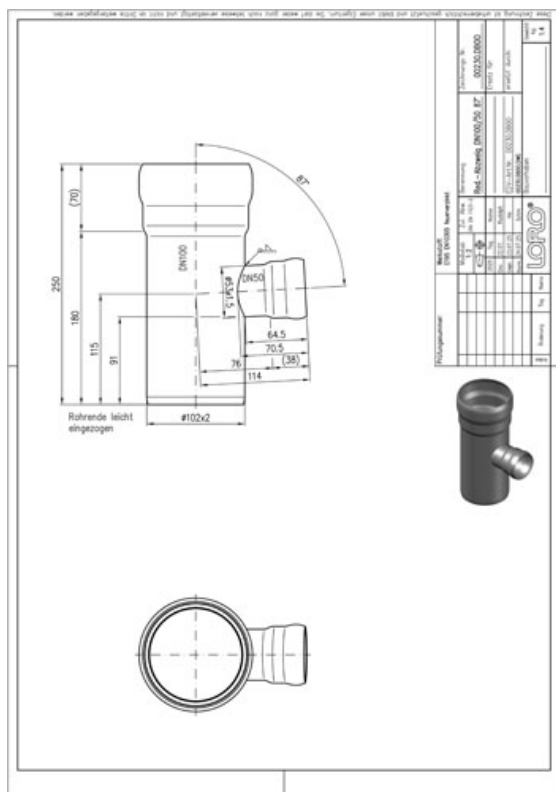

Dane artykułu

Kod EAN	4038088109854
Klasa ETIM	EC003025
Średnica nominalna	DN 100, DN 50
Długość/stożek nominalny	87
Wymiary zewnętrzne (WxSxD)	118 x 175 x 250 mm
Waga	1,50 Kg (STK)
Grupa produktów	1
Numer taryfy celnej	73063012
Materiał / Kolor	Stahl feuerverzinkt, Silber

Wskazówki dotyczące użytkowania

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

Pobieranie



Alles online

[Instrukcja montażu \(PDF\)](#)

[Certyfikat \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Rysunek wymiarowy \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Broszura \(PDF\)](#)

[CAD 3D \(DWG\)](#)