



LX-RED-ABZWEIG O. IB 87 GRAD DN100/50

LORO-X reducing branch without inside coating 87 degrees DN 100/50

Beskrivelsestekst

LORO-X reducing branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, without inside coating, 87 degrees, DN100/50

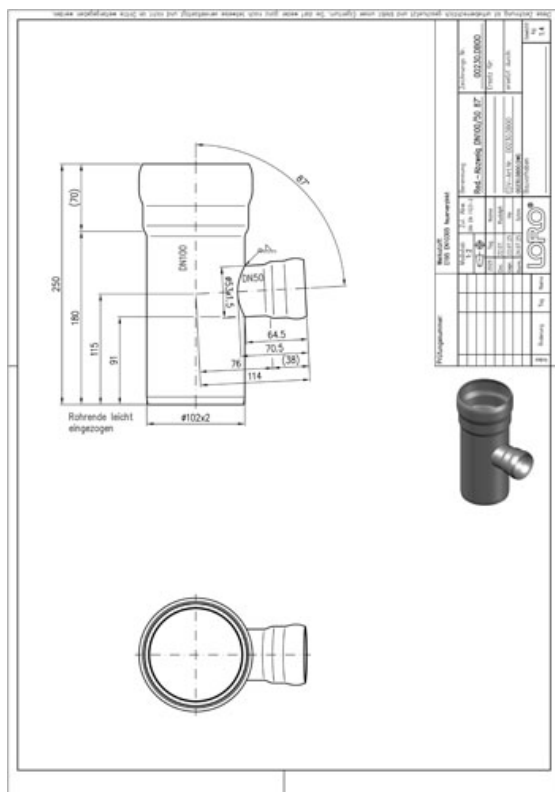

Artikkeldata

EAN-kode	4038088109854
ETIM-klasse	EC003025
Nominell diameter	DN 100, DN 50
Nominell lengde/grad	87
Utvendige mål (HxBxL)	118 x 175 x 250 mm
Vekt	1,50 Kg (STK)
Produktgruppe	1
Tolltariffnummer	73063012
Materiale / Farge	Stahl feuerverzinkt, Silber

Bruksanvisning

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

Nedlastinger



Alles online

[Monteringsanvisning \(PDF\)](#)

[Godkjenning \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Måltegning \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Brosjyre \(PDF\)](#)

[CAD 3D \(DWG\)](#)