LORO-X REDUCED BRANCH 87 DEGREE DN 125/100

LORO-X reduced branch 87 degrees DN 125/100

Beskrivning

LORO-X reducing branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 87 degrees, DN125/100

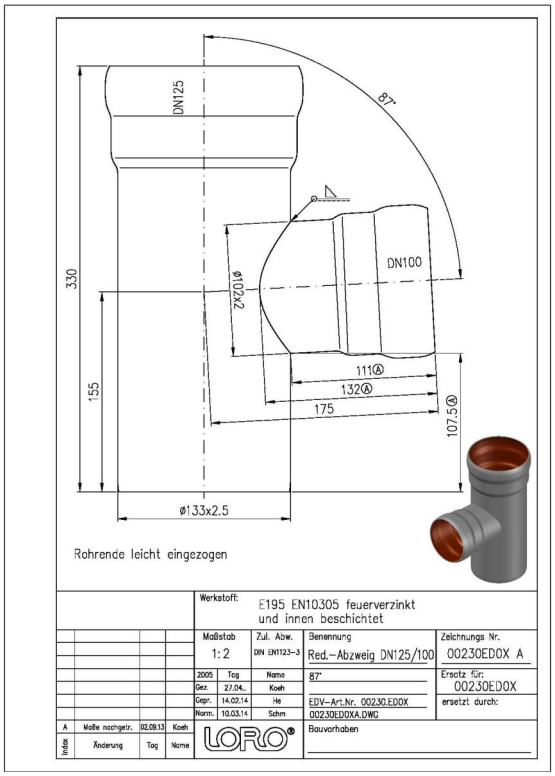

Artikeldata

EAN-kod	**4038088013731**
ETIM-klass	**EC003025**
Nominell diameter	**DN 125, DN 100**
Nominell längd/grad	**87**
Yttermått (HxBxL)	**152 x 254 x 330 mm**
Vikt	**3,40 Kg (STK)**
Produktgrupp	**1**
Tullnummer	**73089098**
Material / Färg	**Stahl feuerverzinkt, Silber**

Användningsanvisning

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300.Bei LORO-X Abzweigen mit Reduktion steht die erste Nennweite für das gerade Rohrstück und die zweite Nennweite für das kleinere, darin mündende Abzweigrohr.Beispiel DN100/70: Ein DN70 Rohr mündet in ein DN100 Rohr in Fließrichtung.

Nedladdningar

Alles online

- Monteringsanvisning (PDF)
- Godkännande (PDF)
- BIM 3D (STEP)
- Måttritning (PDF)
- CAD 2D (DXF)
- BIM 3D (IFC)
- Broschyr (PDF)
- CAD 3D (DWG)