


LORO-X REDUCED BRANCH 87 DEGREE

DN 80/70

LORO-X reduced branch 87 degrees DN 80/70

Описание

LORO-X reducing branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 87 degrees, DN 80/70

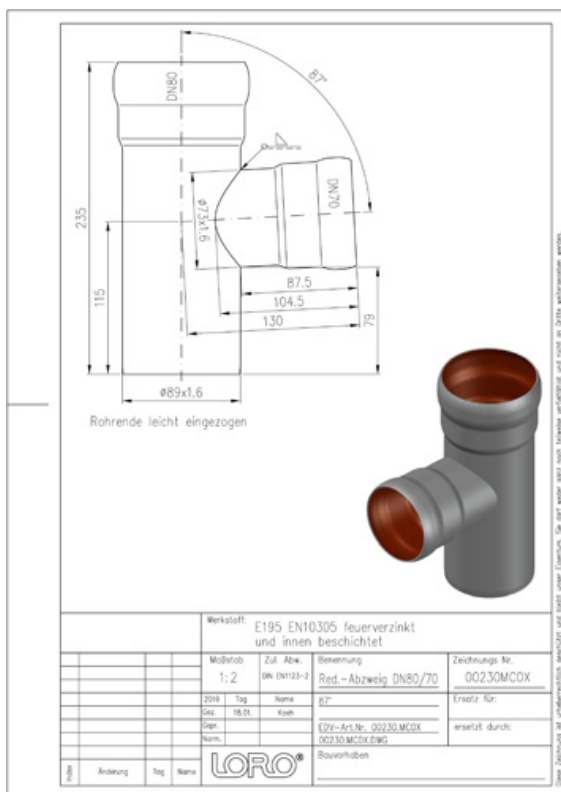

Данни за артикула

ЕАН код	4038088042694
ETIM клас	EC003025
Номинален диаметър	DN 80, DN 70
Номинална дължина/градус	87
Външни размери (ВхШхД)	235 x 183 x 102 mm
Тегло	1,20 Kg (STK)
Продуктова група	1
Митнически тарифен номер	73089098
Материал / Цвят	Stahl feuerverzinkt, Silber

Забелешка за употреба

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300. Bei LORO-X Abzweigen mit Reduktion steht die erste Nennweite für das gerade Rohrstück und die zweite Nennweite für das kleinere, darin mündende Abzweigrohr. Beispiel DN100/70: Ein DN70 Rohr mündet in ein DN100 Rohr in Fließrichtung.

Изтегляния



Alles online

[Инструкция за монтаж \(PDF\)](#)

Сертификат (PDF)

BIM 3D (STEP)

[CAD чертеж \(PDF\)](#)

CAD 2D (DXF)

BIM 3D (IFC)

[Брошура \(PDF\)](#)

CAD 3D (DWG)