


LORO-X TRANSITION BRANCH 87 DEGREE

DN 70/40/50

LORO-X transition branch 87 degrees DN 70/40/50

Descrição

LORO-X transition branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 87 degrees, DN50/40/70

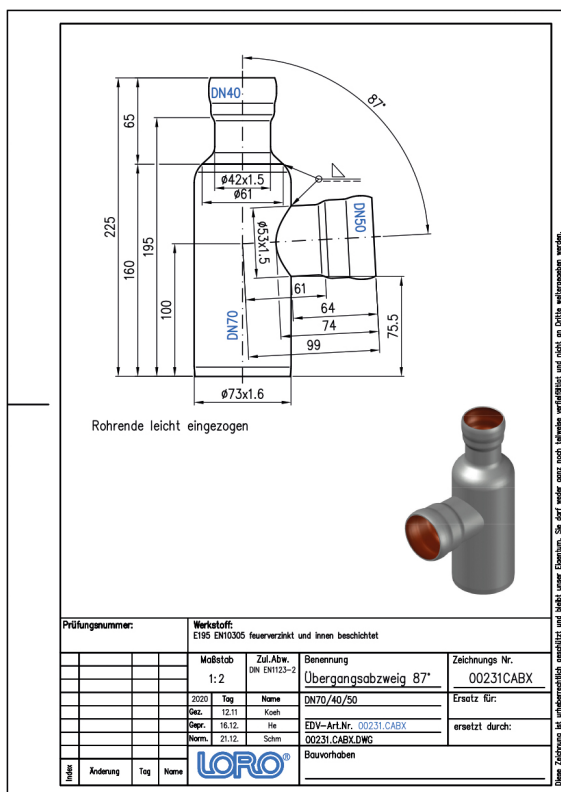

Dados do artigo

Código EAN	4038088013908
Classe ETIM	EC003025
Diâmetro nominal	DN 70, DN 40, DN 50
Comprimento/grau nominal	87
Medidas exteriores (AxLxP)	84 x 137 x 225 mm
Peso	0,80 Kg (STK)
Grupo de produtos	1
Número de pauta aduaneira	73089098
Material / Cor	Stahl feuerverzinkt, Silber

Nota de utilização

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300. Bei LORO-X Abzweigen mit Reduktion steht die erste Nennweite für das gerade Rohrstück und die zweite Nennweite für das kleinere, darin mündende Abzweigrohr. Beispiel DN100/70: Ein DN70 Rohr mündet in ein DN100 Rohr in Fließrichtung.

Transferências



Alles online

[Instruções de instalação \(PDF\)](#)

Homologação (PDF)

BIM 3D (STEP)

[Desenho cotado \(PDF\)](#)

CAD 2D (DXF)

BIM 3D (IFC)

[Brochura \(PDF\)](#)

CAD 3D (DWG)