LORO-X TRANSITION BRANCH 87 DEGREE DN 70/50/50

LORO-X transition branch 87 degrees DN 70/50/50

Leírás

LORO-X transition branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 87 degrees, DN70/50/50

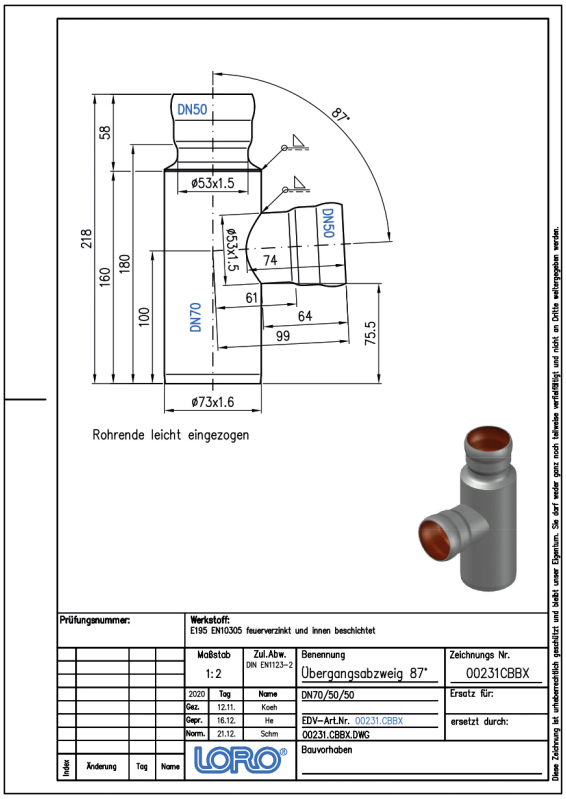

Cikkadatok

EAN kód	4038088013922
ETIM osztály	EC003025
Névleges átmérő	DN 70, DN 50, DN 50
Névleges hossz/fok	87
Külső méretek (MxSzxH)	84 x 137 x 218 mm
Súly	0,70 Kg (STK)
Termékcsoport	1
Vámtarifaszám	73089098
Anyag / Szín	Stahl feuerverzinkt, Silber

Használati megjegyzés

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300.Bei LORO-X Abzweigen mit Reduktion steht die erste Nennweite für das gerade Rohrstück und die zweite Nennweite für das kleinere, darin mündende Abzweigrohr.Beispiel DN100/70: Ein DN70 Rohr mündet in ein DN100 Rohr in Fließrichtung.

Letöltések

Alles online

Szerelési útmutató (PDF)
Engedély (PDF)
BIM 3D (STEP)
Méretrajz (PDF)
CAD 2D (DXF)
BIM 3D (IFC)
Prospektus (PDF)
CAD 3D (DWG)