LORO-X REDUCED BRANCH 70 DEGREE DN 70/50

LORO-X reduced branch 70 degrees DN 70/50

Beskrivning

LORO-X reducing branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 70 degrees, DN70/50

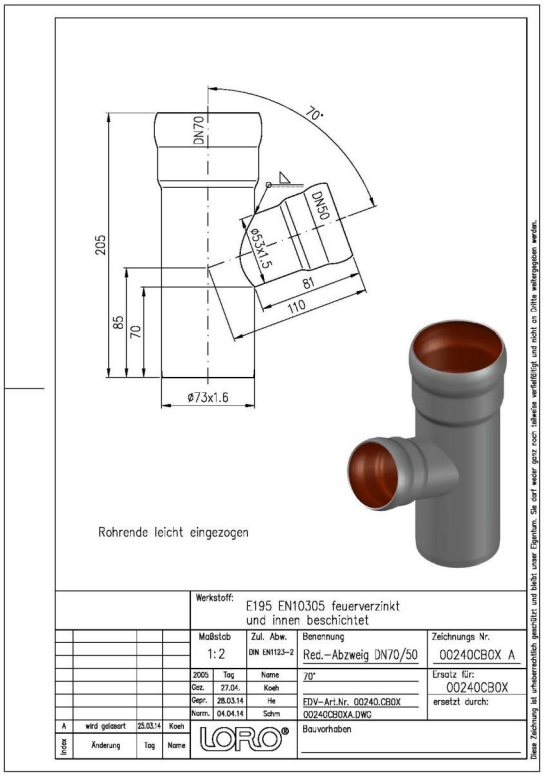

Artikeldata

EAN-kod	**4038088014028**
ETIM-klass	**EC003025**
Nominell diameter	**DN 70, DN 50**
Nominell längd/grad	**70**
Yttermått (HxBxL)	**84 x 156 x 205 mm**
Vikt	**0,80 Kg (STK)**
Produktgrupp	**1**
Tullnummer	**73089098**
Material / Färg	**Stahl feuerverzinkt, Silber**

Användningsanvisning

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300.Bei LORO-X Abzweigen mit Reduktion steht die erste Nennweite für das gerade Rohrstück und die zweite Nennweite für das kleinere, darin mündende Abzweigrohr.Beispiel DN100/70: Ein DN70 Rohr mündet in ein DN100 Rohr in Fließrichtung.

Nedladdningar

Alles online

Monteringsanvisning (PDF)
Godkännande (PDF)
Måttritning (PDF)
CAD 2D (DXF)
Broschyr (PDF)
CAD (DWG)