LORO-X REDUCED BRANCH 70 DEGREE DN 100/70

LORO-X reduced branch 70 degrees DN 100/70

Leírás

LORO-X reducing branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 70 degrees, DN100/70

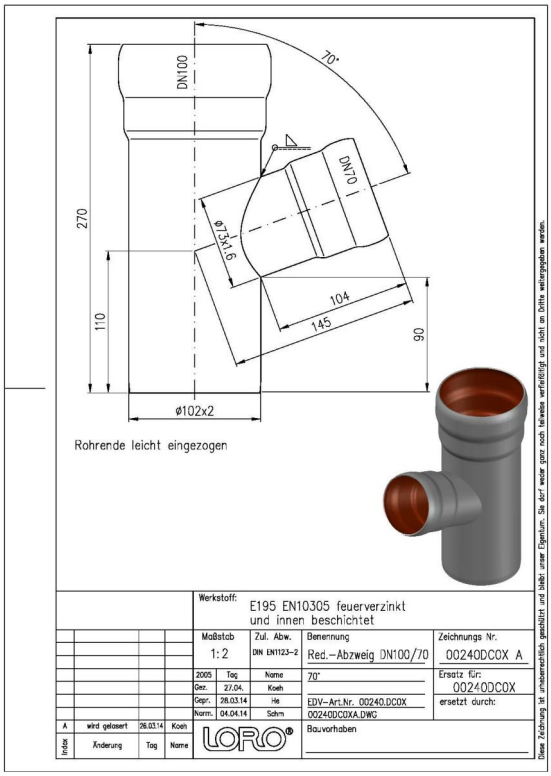

Cikkadatok

EAN kód	4038088014059
ETIM osztály	EC003025
Névleges átmérő	DN 100, DN 70
Névleges hossz/fok	70
Külső méretek (MxSzxH)	118 x 209 x 270 mm
Súly	1,80 Kg (STK)
Termékcsoport	1
Vámtarifaszám	73089098
Anyag / Szín	Stahl feuerverzinkt, Silber

Használati megjegyzés

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300.Bei LORO-X Abzweigen mit Reduktion steht die erste Nennweite für das gerade Rohrstück und die zweite Nennweite für das kleinere, darin mündende Abzweigrohr.Beispiel DN100/70: Ein DN70 Rohr mündet in ein DN100 Rohr in Fließrichtung.

Letöltések

Alles online

Szerelési útmutató (PDF)
Engedély (PDF)
Méretrajz (PDF)
CAD 2D (DXF)
Prospektus (PDF)
CAD (DWG)