LORO-X REDUCED BRANCH 45 DEGREE DN 40/32

LORO-X reduced branch 45 degrees DN 40/32

Descripción

LORO-X reducing branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN40/32

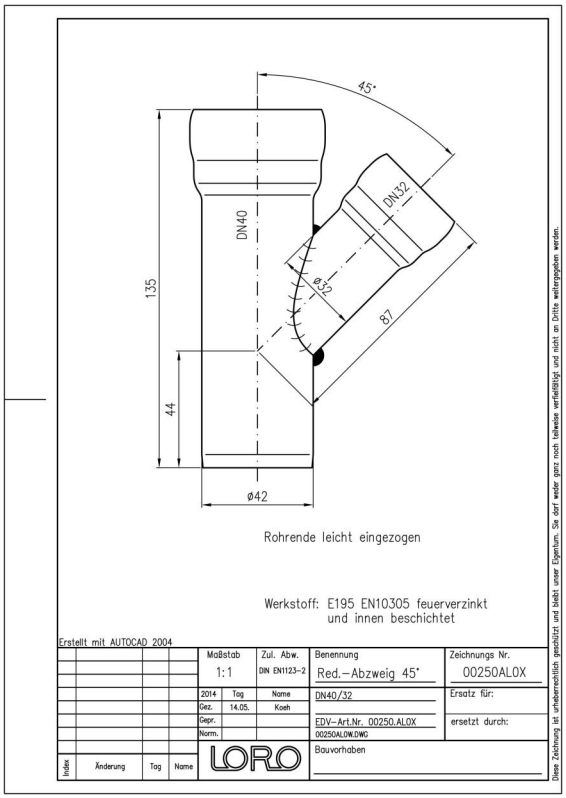

Datos del artículo

Código EAN	**4038088014332**
Clase ETIM	**EC003025**
Diámetro nominal	**DN 40, DN 32**
Longitud/grado nominal	**45**
Medidas exteriores (AxAxL)	**51 x 100 x 135 mm**
Peso	**0,30 Kg (STK)**
Grupo de productos	**1**
Número de arancel aduanero	**73089098**
Material / Color	**Stahl feuerverzinkt, Silber**

Nota de uso

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300.Bei LORO-X Abzweigen mit Reduktion steht die erste Nennweite für das gerade Rohrstück und die zweite Nennweite für das kleinere, darin mündende Abzweigrohr.Beispiel DN100/70: Ein DN70 Rohr mündet in ein DN100 Rohr in Fließrichtung.

Descargas

Alles online

Instrucciones de instalación (PDF)
Dibujo dimensional (PDF)
Folleto (PDF)
Certificado (PDF)
CAD 2D (DXF)
CAD (DWG)