LORO-X REDUCED BRANCH 45 DEGREE DN 50/40

LORO-X reduced branch 45 degrees DN 50/40

Beskrivelse

LORO-X reducing branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN50/40

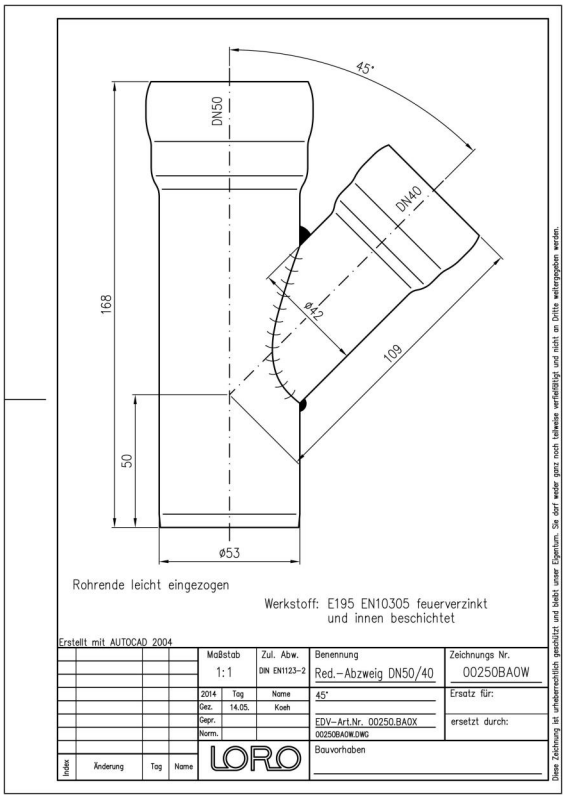

Artikkeldata

EAN-kode	**4038088014356**
ETIM-klasse	**EC003025**
Nominell diameter	**DN 50, DN 40**
Nominell lengde/grad	**45**
Utvendige mål (HxBxL)	**63 x 126 x 168 mm**
Vekt	**0,50 Kg (STK)**
Produktgruppe	**1**
Tolltariffnummer	**73089098**
Materiale / Farge	**Stahl feuerverzinkt, Silber**

Bruksanvisning

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300.Bei LORO-X Abzweigen mit Reduktion steht die erste Nennweite für das gerade Rohrstück und die zweite Nennweite für das kleinere, darin mündende Abzweigrohr.Beispiel DN100/70: Ein DN70 Rohr mündet in ein DN100 Rohr in Fließrichtung.

Nedlastinger

Alles online

Monteringsanvisning (PDF)
Godkjenning (PDF)
Måltegning (PDF)
CAD 2D (DXF)
Brosjyre (PDF)
CAD (DWG)