## LORO-X REDUCED BRANCH 45 DEGREE DN 50/32

**LORO-X reduced branch 45 degrees DN 50/32**

### Description

LORO-X reducing branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN50/32

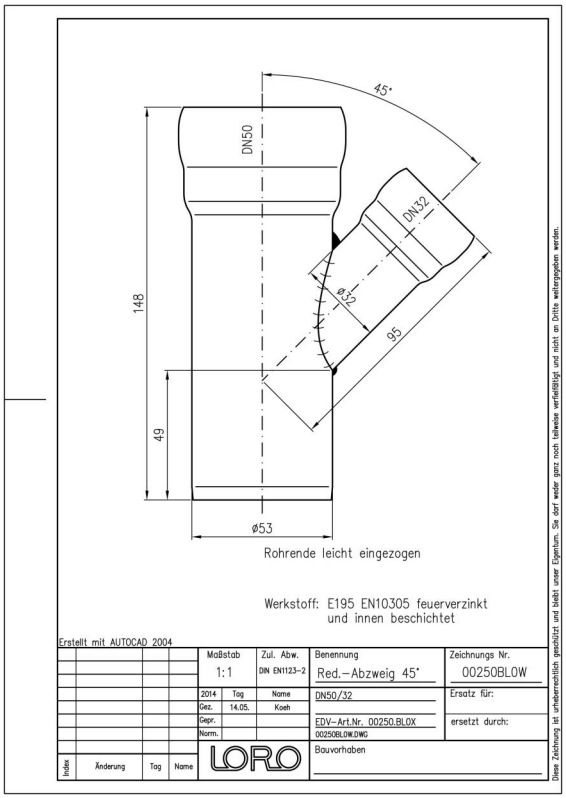


### Données de l'article

| | |
|---|---|
| Code EAN | **4038088048764** |
| Classe ETIM | **EC003025** |
| Diamètre nominal | **DN 50, DN 32** |
| Longueur/degré nominal | **45** |
| Dimensions extérieures (HxLxP) | **63 x 112 x 148 mm** |
| Poids | **0,40 Kg (STK)** |
| Groupe de produits | **1** |
| Numéro tarifaire douanier | **73089098** |
| Matériau / Couleur | **Stahl feuerverzinkt, Silber** |

### Note d'utilisation

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300.Bei LORO-X Abzweigen mit Reduktion steht die erste Nennweite für das gerade Rohrstück und die zweite Nennweite für das kleinere, darin mündende Abzweigrohr.Beispiel DN100/70: Ein DN70 Rohr mündet in ein DN100 Rohr in Fließrichtung.

### Téléchargements

Alles online

Notice d'installation (PDF)
Dessin dimensionnel (PDF)
Brochure (PDF)
Certificat (PDF)
CAD 2D (DXF)
CAD (DWG)