LORO-X REDUCED BRANCH 45 DEGREE DN 70/40

LORO-X reduced branch 45 degrees DN 70/40

Descrizione

LORO-X reducing branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN70/40

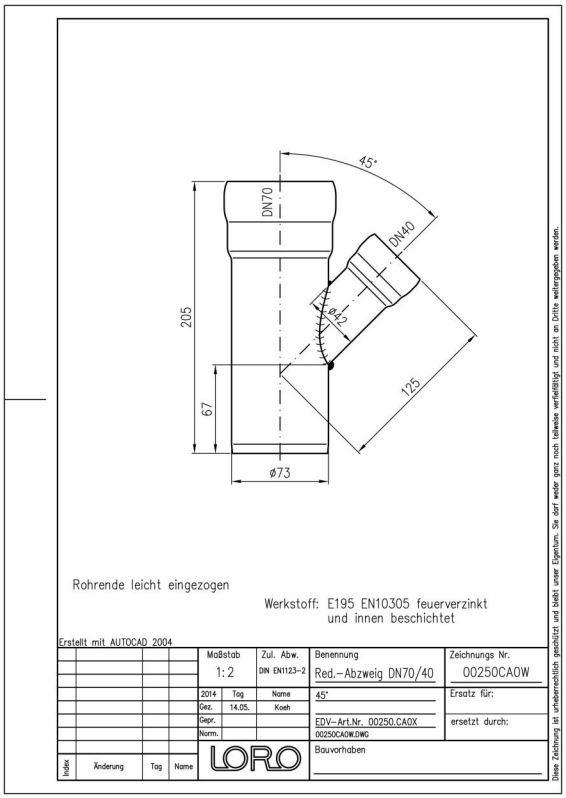

Dati articolo

Codice EAN	**4038088014363**
Classe ETIM	**EC003025**
Diametro nominale	**DN 70, DN 40**
Lunghezza/grado nominale	**45**
Misure esterne (AxLxP)	**84 x 148 x 205 mm**
Peso	**0,80 Kg (STK)**
Gruppo prodotti	**1**
Numero tariffa doganale	**73089098**
Materiale / Colore	**Stahl feuerverzinkt, Silber**

Note d'uso

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300.Bei LORO-X Abzweigen mit Reduktion steht die erste Nennweite für das gerade Rohrstück und die zweite Nennweite für das kleinere, darin mündende Abzweigrohr.Beispiel DN100/70: Ein DN70 Rohr mündet in ein DN100 Rohr in Fließrichtung.

Download

Alles online

Istruzioni di installazione (PDF)
Disegno dimensionale (PDF)
Brochure (PDF)
Certificato (PDF)
CAD 2D (DXF)
CAD (DWG)