LORO-X REDUCED BRANCH 45 DEGREE DN 125/70

LORO-X reduced branch 45 degrees DN 125/70

Kuvaus

LORO-X reducing branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN125/70

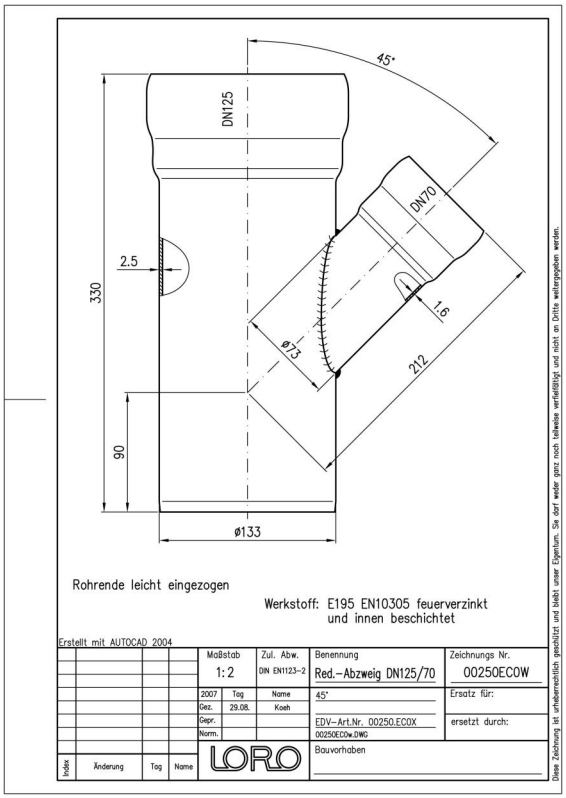

Tuotetiedot

EAN-koodi	**4038088014455**
ETIM-luokka	**EC003025**
Nimellishalkaisija	**DN 125, DN 70**
Nimellispituus/-aste	**45**
Ulkomitat (KxLxS)	**152 x 254 x 330 mm**
Paino	**3,10 Kg (STK)**
Tuoteryhmä	**1**
Tullitariffin numero	**73089098**
Materiaali / Väri	**Stahl feuerverzinkt, Silber**

Käyttöohje

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300.Bei LORO-X Abzweigen mit Reduktion steht die erste Nennweite für das gerade Rohrstück und die zweite Nennweite für das kleinere, darin mündende Abzweigrohr.Beispiel DN100/70: Ein DN70 Rohr mündet in ein DN100 Rohr in Fließrichtung.

Lataukset

Alles online

Asennusohje (PDF)
Hyväksyntä (PDF)
Mittapiirustus (PDF)
CAD 2D (DXF)
Esite (PDF)
CAD (DWG)