LORO-X REDUCED BRANCH 45 DEGREE DN 125/100

LORO-X reduced branch 45 degrees DN 125/100

Opis

LORO-X reducing branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN125/100

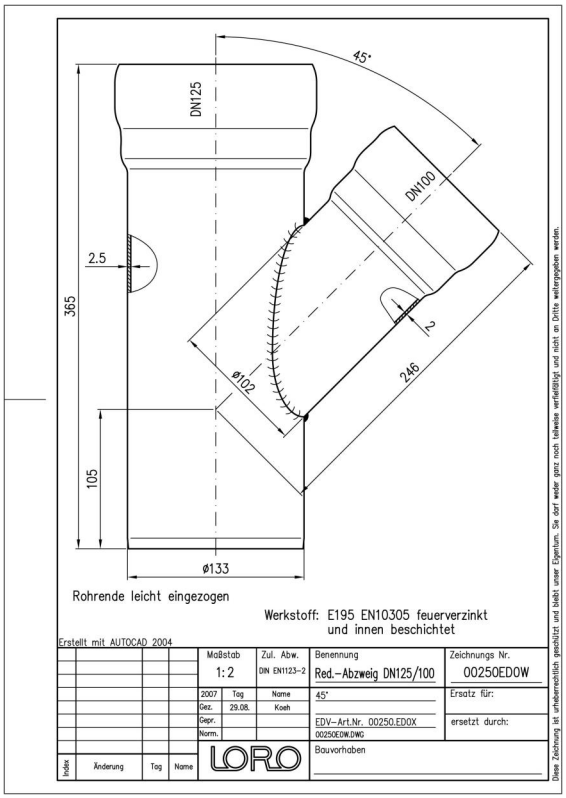

Podatki o izdelku

EAN koda	**4038088014462**
ETIM razred	**EC003025**
Nazivni premer	**DN 125, DN 100**
Nazivna dolžina/stopinja	**45**
Zunanje mere (VxŠxD)	**152 x 289 x 365 mm**
Teža	**3,90 Kg (STK)**
Skupina izdelkov	**1**
Carinska tarifna številka	**73089098**
Material / Barva	**Stahl feuerverzinkt, Silber**

Opomba za uporabo

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300.Bei LORO-X Abzweigen mit Reduktion steht die erste Nennweite für das gerade Rohrstück und die zweite Nennweite für das kleinere, darin mündende Abzweigrohr.Beispiel DN100/70: Ein DN70 Rohr mündet in ein DN100 Rohr in Fließrichtung.

Prenosi

Alles online

- Navodila za vgradnjo (PDF)
- Certifikat (PDF)
- BIM 3D (STEP)
- Merska risba (PDF)
- CAD 2D (DXF)
- BIM 3D (IFC)
- Prospekt (PDF)
- CAD 3D (DWG)