## LORO-X REDUCED BRANCH 45 DEGREE DN 200/100

**LORO-X reduced branch 45 degrees DN 200/100**

### Descrizione

LORO-X reducing branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN200/100

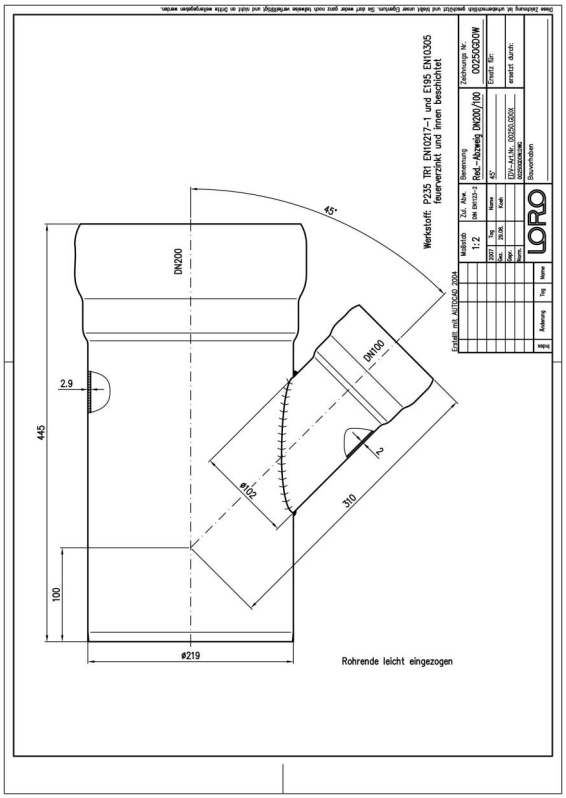


### Dati articolo

| | |
|---|---|
| Codice EAN | **4038088014547** |
| Classe ETIM | **EC003025** |
| Diametro nominale | **DN 200, DN 100** |
| Lunghezza/grado nominale | **45** |
| Misure esterne (AxLxP) | **247 x 382 x 445 mm** |
| Peso | **8,30 Kg (STK)** |
| Gruppo prodotti | **1** |
| Numero tariffa doganale | **73089098** |
| Materiale / Colore | **Stahl feuerverzinkt, Silber** |

### Note d'uso

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300.Bei LORO-X Abzweigen mit Reduktion steht die erste Nennweite für das gerade Rohrstück und die zweite Nennweite für das kleinere, darin mündende Abzweigrohr.Beispiel DN100/70: Ein DN70 Rohr mündet in ein DN100 Rohr in Fließrichtung.

### Download

Alles online

Istruzioni di installazione (PDF)
Certificato (PDF)
Disegno dimensionale (PDF)
CAD 2D (DXF)
Brochure (PDF)
CAD (DWG)