


LORO-X REDUCED BRANCH 45 DEGREE DN 200/125

LORO-X reduced branch 45 degrees DN 200/125

Description

LORO-X reducing branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN200/125

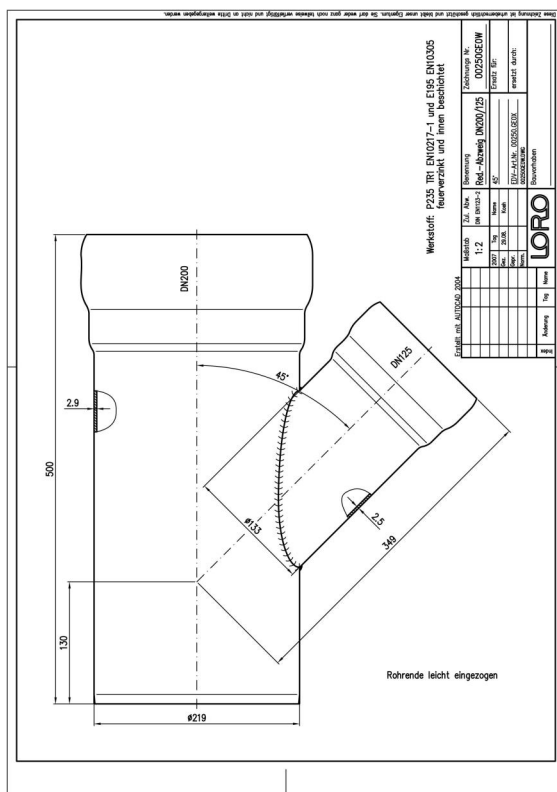

Article information

EAN Code	4038088014554
ETIM Class	EC003025
Nominal diameter	DN 200, DN 125
Nominal length/degree	45
Outside measurements (HxWxL)	247 x 422 x 500 mm
Weight	9,10 Kg (STK)
Product group	1
Customs tariff number	73089098
Material / Color	Stahl feuerverzinkt, Silber

Usage note

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300. Bei LORO-X Abzweigen mit Reduktion steht die erste Nennweite für das gerade Rohrstück und die zweite Nennweite für das kleinere, darin mündende Abzweigrohr. Beispiel DN100/70: Ein DN70 Rohr mündet in ein DN100 Rohr in Fließrichtung.

Downloads



Alles online

[Installation \(PDF\)](#)

[Certificate \(PDF\)](#)

[CAD drawing \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Brochure \(PDF\)](#)

[CAD \(DWG\)](#)