LORO-X REDUCED BRANCH 45 DEGREE DN 200/150

LORO-X reduced branch 45 degrees DN 200/150

Popis

LORO-X reducing branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN200/150

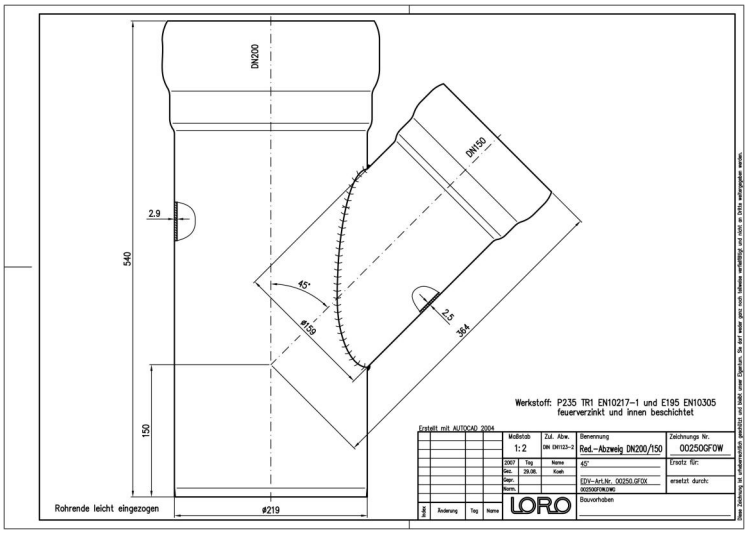

Údaje o artikli

EAN kód	**4038088014561**
ETIM trieda	**EC003025**
Menovitý priemer	**DN 200, DN 150**
Menovitá dĺžka/stupeň	**45**
Vonkajšie rozmery (VxŠxH)	**247 x 442 x 540 mm**
Hmotnosť	**9,90 Kg (STK)**
Skupina produktov	**1**
Colný sadzobník	**73089098**
Materiál / Farba	**Stahl feuerverzinkt, Silber**

Pokyny na použitie

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300.Bei LORO-X Abzweigen mit Reduktion steht die erste Nennweite für das gerade Rohrstück und die zweite Nennweite für das kleinere, darin mündende Abzweigrohr.Beispiel DN100/70: Ein DN70 Rohr mündet in ein DN100 Rohr in Fließrichtung.

Na stiahnutie

Alles online

- Návod na montáž (PDF)
- Certifikát (PDF)
- Rozmerový výkres (PDF)
- CAD 2D (DXF)
- Prospekt (PDF)
- CAD (DWG)