


LORO-X TRANSITION BRANCH 45 DEGREE

DN 70/40/50

LORO-X transition branch 45 degrees DN 70/40/50

Descrizione

LORO-X transition branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN50/40/70

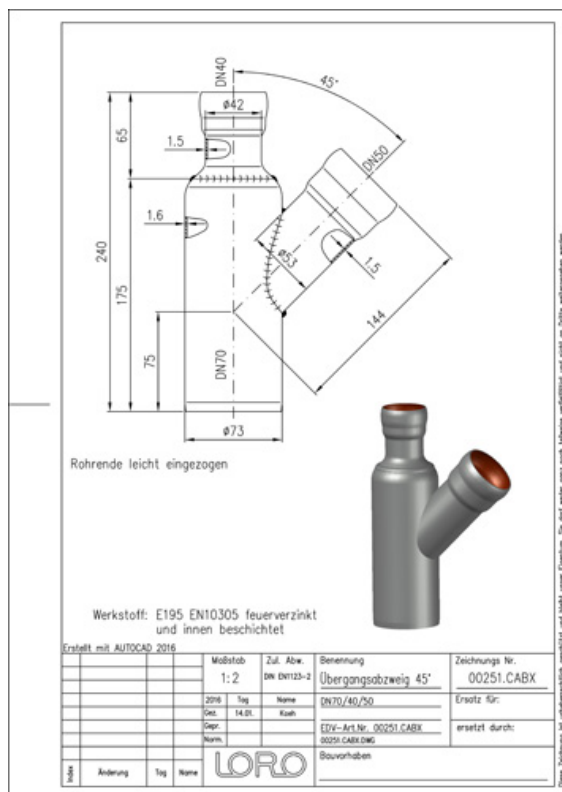

Date articol

Cod EAN	4038088014714
Clasă ETIM	EC003025
Diametru nominal	DN 70, DN 40, DN 50
Lungime/grad nominal	45
Dimensiuni exterioare (îxLxA)	84 x 159 x 240 mm
Greutate	0,80 Kg (STK)
Grupă de produse	1
Număr tarif vamal	73089098
Material / Culoare	Stahl feuerverzinkt, Silber

Notă de utilizare

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300. Bei LORO-X Abzweigen mit Reduktion steht die erste Nennweite für das gerade Rohrstück und die zweite Nennweite für das kleinere, darin mündende Abzweigrohr. Beispiel DN100/70: Ein DN70 Rohr mündet in ein DN100 Rohr in Fließrichtung.

Descărcări



Alles online

[Instrucțiuni de montaj \(PDF\)](#)

[Certificat \(PDF\)](#)

BIM 3D (STEP)

[Desen CAD \(PDF\)](#)

CAD 2D (DXF)

BIM 3D (IFC)

[Brosură \(PDF\)](#)

CAD 3D (DWG)