
LORO-X DOUBLE BRANCH 87 DEGREE DN 70/70/70

LORO-X double branch 87 degrees DN 70/70/70

Tarjouspyyntöteksti

LORO-X double branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 87 degrees, DN70/70/70



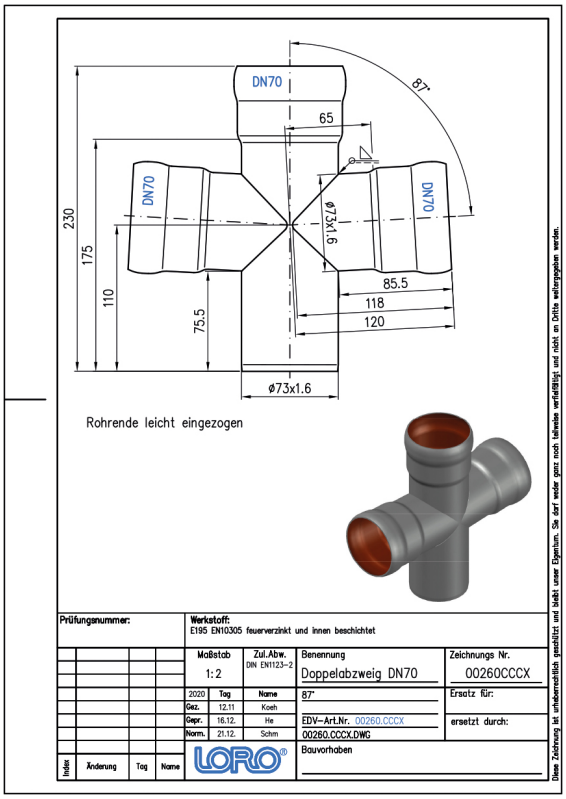

Tuotetiedot

EAN-koodi	**4038088014851**
ETIM-luokka	**EC003026**
Nimellishalkaisija	**DN 70, DN 70, DN 70**
Nimellispituus/-aste	**87**
Ulkomitat (KxLxS)	**84 x 244 x 230 mm**
Paino	**1,20 Kg (STK)**
Tuoteryhmä	**1**
Tullitariffin numero	**73089098**
Materiaali / Väri	**Stahl feuerverzinkt, Silber**

Käyttöohje

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300.Bei LORO-X Abzweigen mit Reduktion steht die erste Nennweite für das gerade Rohrstück und die zweite Nennweite für das kleinere, darin mündende Abzweigrohr.Beispiel DN100/70: Ein DN70 Rohr mündet in ein DN100 Rohr in Fließrichtung.

Lataukset

Alles online

Asennusohje (PDF)
Hyväksyntä (PDF)
BIM 3D (STEP)
Mittapiirustus (PDF)
CAD 2D (DXF)
BIM IFC4 (parametrisch)
Esite (PDF)
CAD 3D (DWG)
BIM 3D (IFC)