LORO-X DOUBLE BRANCH 87 DEGREE DN 70/70/70

LORO-X double branch 87 degrees DN 70/70/70

Besedilo za popis del

LORO-X double branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 87 degrees, DN70/70/70

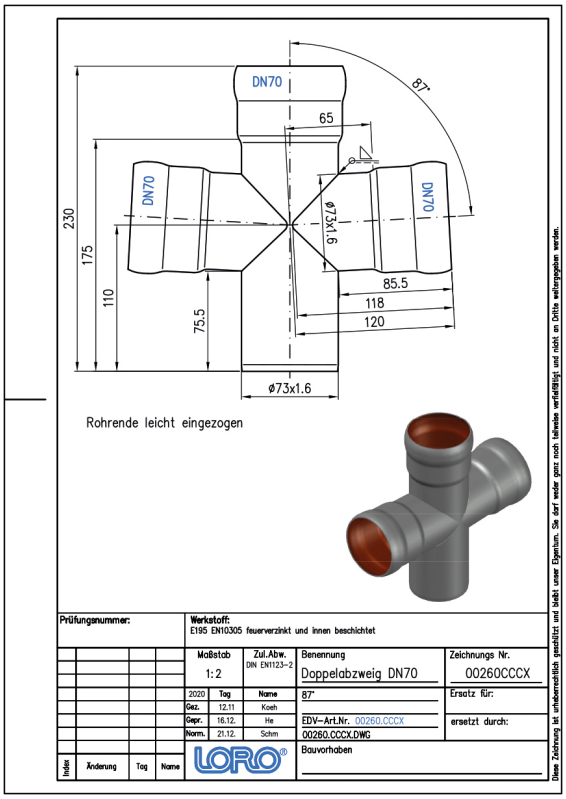

Podatki o izdelku

EAN koda	**4038088014851**
ETIM razred	**EC003026**
Nazivni premer	**DN 70, DN 70, DN 70**
Nazivna dolžina/stopinja	**87**
Zunanje mere (VxŠxD)	**84 x 244 x 230 mm**
Teža	**1,20 Kg (STK)**
Skupina izdelkov	**1**
Carinska tarifna številka	**73089098**
Material / Barva	**Stahl feuerverzinkt, Silber**

Opomba za uporabo

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300.Bei LORO-X Abzweigen mit Reduktion steht die erste Nennweite für das gerade Rohrstück und die zweite Nennweite für das kleinere, darin mündende Abzweigrohr.Beispiel DN100/70: Ein DN70 Rohr mündet in ein DN100 Rohr in Fließrichtung.

Prenosi

Alles online

Navodila za vgradnjo (PDF)
Certifikat (PDF)
BIM 3D (STEP)
Merska risba (PDF)
CAD 2D (DXF)
BIM IFC4 (parametrisch)
Prospekt (PDF)
CAD 3D (DWG)
BIM 3D (IFC)