


LORO-X REDUCED BOUBLE BRANCH 87 DEGREE DN 100/70/70

LORO-X reduced double branch 87 degrees DN 100/70/70

Opis

LORO-X reducing double branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 87 degrees, DN100/70/70

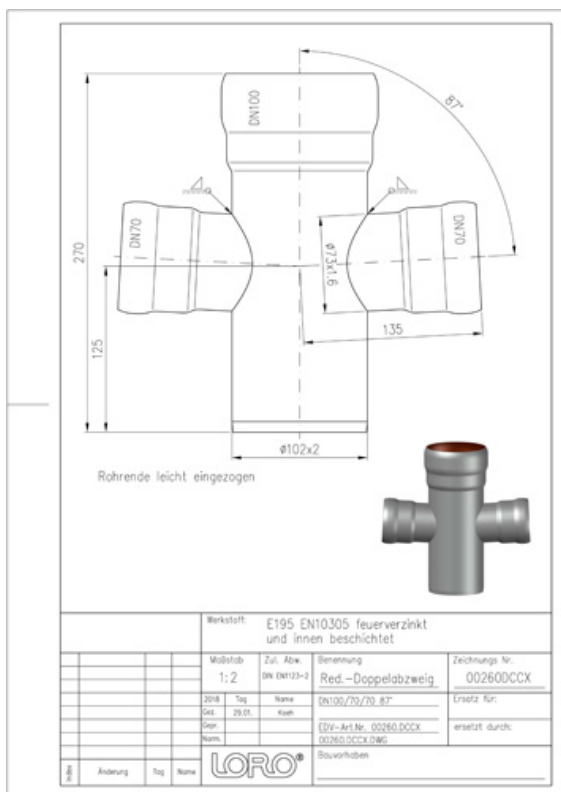

Podaci o artiklu

EAN kod	4038088014882
ETIM klasa	EC003026
Nazivni promjer	DN 100, DN 70, DN 70
Nazivna duljina/stupanj	87
Vanjske mjere (VxŠxD)	118 x 274 x 270 mm
Težina	2,00 Kg (STK)
Grupa proizvoda	1
Carinski tarifni broj	73089098
Materijal / Boja	Stahl feuerverzinkt, Silber

Napomena za upotrebu

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300. Bei LORO-X Abzweigen mit Reduktion steht die erste Nennweite für das gerade Rohrstück und die zweite Nennweite für das kleinere, darin mündende Abzweigrohr. Beispiel DN100/70: Ein DN70 Rohr mündet in ein DN100 Rohr in Fließrichtung.

Preuzimanja



Alles online

[Upute za ugradnju \(PDF\)](#)

[Certifikat \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Dimenzijski crtež \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametrisch\)](#)

[Prospekt \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)