LORO-X D0UBLE BRANCH 87 DEGREE DN 100/100/100

LORO-X double branch 87 degrees DN 100/100/100

Текст за тръжна документация

LORO-X double branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 87 degrees, DN100/100/100

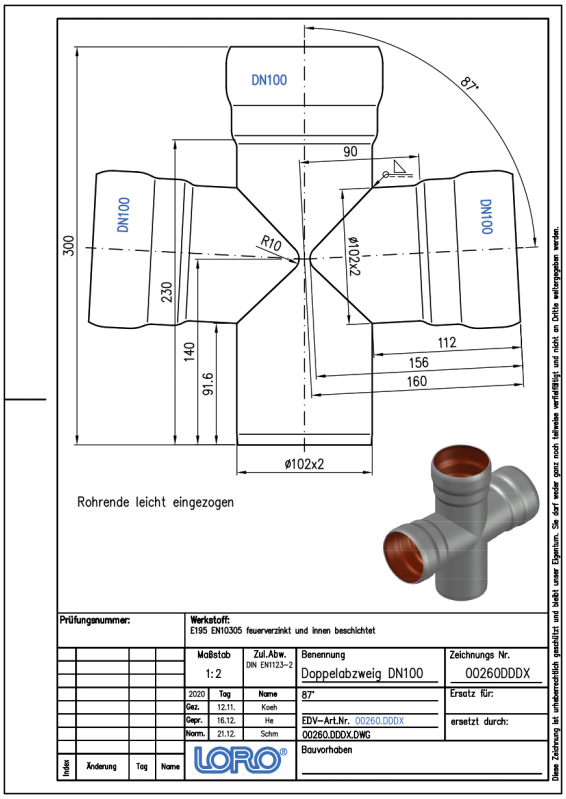

Данни за артикула

EAN код	**4038088014899**
ETIM клас	**EC003026**
Номинален диаметър	**DN 100, DN 100, DN 100**
Номинална дължина/градус	**87**
Външни размери (ВхШхД)	**118 x 325 x 300 mm**
Тегло	**2,70 Kg (STK)**
Продуктова група	**1**
Митнически тарифен номер	**73089098**
Материал / Цвят	**Stahl feuerverzinkt, Silber**

Забележка за употреба

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300.Bei LORO-X Abzweigen mit Reduktion steht die erste Nennweite für das gerade Rohrstück und die zweite Nennweite für das kleinere, darin mündende Abzweigrohr.Beispiel DN100/70: Ein DN70 Rohr mündet in ein DN100 Rohr in Fließrichtung.

Изтегляния

Alles online

Инструкция за монтаж (PDF)
Сертификат (PDF)
BIM 3D (STEP)
CAD чертеж (PDF)
CAD 2D (DXF)
BIM IFC4 (parametrisch)
Брошура (PDF)
CAD 3D (DWG)
BIM 3D (IFC)