Scheda tecnica del prodotto

LORO_Produkt-Datenblatt_00260.DDDX_it.pdf
Articolo 00260.DDDX
29.10.2026, 20:07

LORO-X D0UBLE BRANCH 87 DEGREE DN 100/100/100

LORO-X double branch 87 degrees DN 100/100/100

Voce di capitolato

LORO-X double branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 87 degrees, DN100/100/100

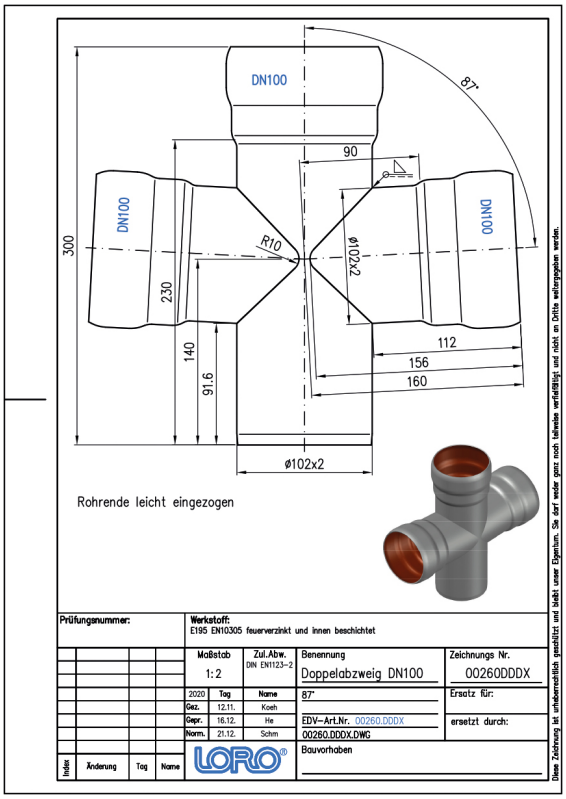

Dati articolo

Codice EAN	**4038088014899**
Classe ETIM	**EC003026**
Diametro nominale	**DN 100, DN 100, DN 100**
Lunghezza/grado nominale	**87**
Misure esterne (AxLxP)	**118 x 325 x 300 mm**
Peso	**2,70 Kg (STK)**
Gruppo prodotti	**1**
Numero tariffa doganale	**73089098**
Materiale / Colore	**Stahl feuerverzinkt, Silber**

Note d'uso

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300.Bei LORO-X Abzweigen mit Reduktion steht die erste Nennweite für das gerade Rohrstück und die zweite Nennweite für das kleinere, darin mündende Abzweigrohr.Beispiel DN100/70: Ein DN70 Rohr mündet in ein DN100 Rohr in Fließrichtung.

Download

Alles online

Istruzioni di installazione (PDF)
Disegno dimensionale (PDF)
Brochure (PDF)
Certificato (PDF)
CAD 2D (DXF)
CAD 3D (DWG)
BIM 3D (STEP)
BIM IFC4 (parametrisch)
BIM 3D (IFC)