LORO-X DOUBLE BRANCH 45 DEGREE DN 50/50/50

LORO-X double branch 45 degrees DN 50/50/50

Text pro výběrové řízení

LORO-X double branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN50/50/50

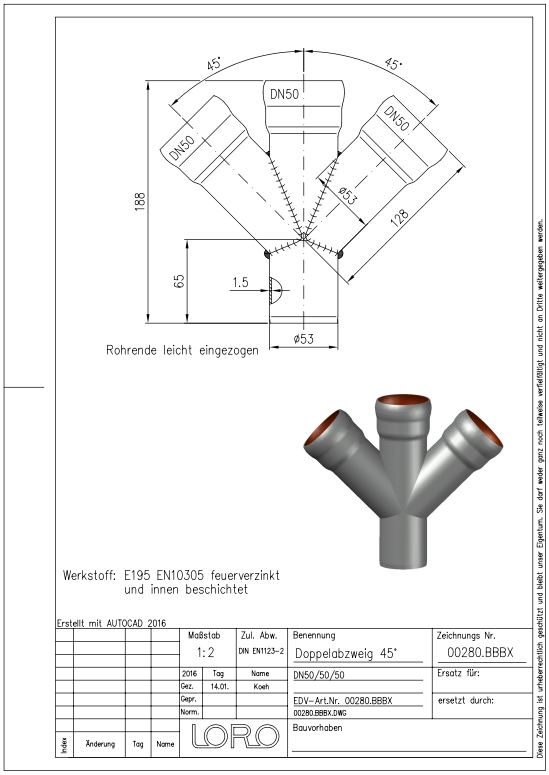

Údaje o artiklu

EAN kód	**4038088015780**
ETIM třída	**EC003026**
Jmenovitý průměr	**DN 50, DN 50, DN 50**
Jmenovitá délka/stupeň	**45**
Vnější rozměry (VxŠxD)	**63 x 223 x 188 mm**
Hmotnost	**0,90 Kg (STK)**
Skupina produktů	**1**
Celní sazebník	**73089098**
Materiál / Barva	**Stahl feuerverzinkt, Silber**

Pokyny k použití

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300.Bei LORO-X Abzweigen mit Reduktion steht die erste Nennweite für das gerade Rohrstück und die zweite Nennweite für das kleinere, darin mündende Abzweigrohr.Beispiel DN100/70: Ein DN70 Rohr mündet in ein DN100 Rohr in Fließrichtung.

Ke stažení

Alles online

Návod k instalaci (PDF)
Certifikát (PDF)
BIM 3D (STEP)
Výkres rozměrů (PDF)
CAD 2D (DXF)
BIM IFC4 (parametrisch)
Prospekt (PDF)
CAD 3D (DWG)
BIM 3D (IFC)