LORO-X DOUBLE BRANCH 45 DEGREE DN 70/70/70

LORO-X double branch 45 degrees DN 70/70/70

Text pre výberové konanie

LORO-X double branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN70/70/70

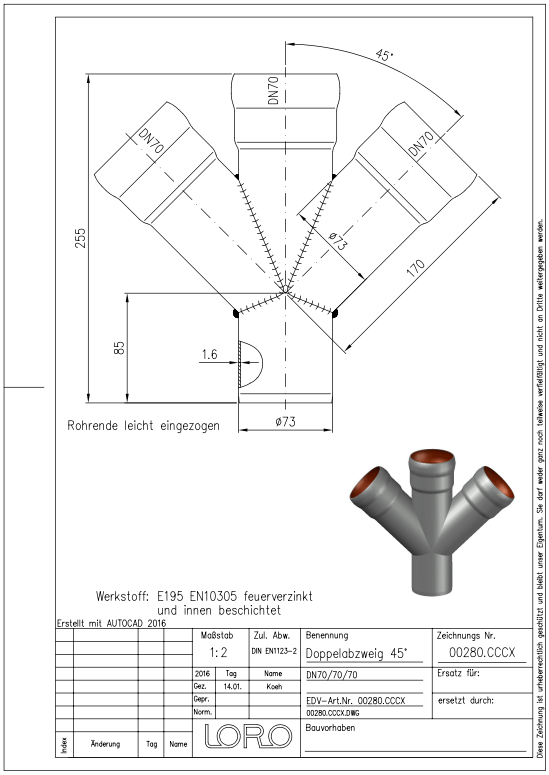

Údaje o artikli

EAN kód	**4038088015810**
ETIM trieda	**EC003026**
Menovitý priemer	**DN 70, DN 70, DN 70**
Menovitá dĺžka/stupeň	**45**
Vonkajšie rozmery (VxŠxH)	**84 x 297 x 255 mm**
Hmotnosť	**1,40 Kg (STK)**
Skupina produktov	**1**
Colný sadzobník	**73089098**
Materiál / Farba	**Stahl feuerverzinkt, Silber**

Pokyny na použitie

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300.Bei LORO-X Abzweigen mit Reduktion steht die erste Nennweite für das gerade Rohrstück und die zweite Nennweite für das kleinere, darin mündende Abzweigrohr.Beispiel DN100/70: Ein DN70 Rohr mündet in ein DN100 Rohr in Fließrichtung.

Na stiahnutie

Alles online

Návod na montáž (PDF)
Certifikát (PDF)
BIM 3D (STEP)
Rozmerový výkres (PDF)
CAD 2D (DXF)
BIM IFC4 (parametrisch)
Prospekt (PDF)
CAD 3D (DWG)
BIM 3D (IFC)