
LORO-X REDUCED DOUBLE BRANCH 45 DEGREE DN 100/50/50

LORO-X reduced double branch 45 degrees DN 100/50/50

Descrição

LORO-X reducing double branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN100/50/50



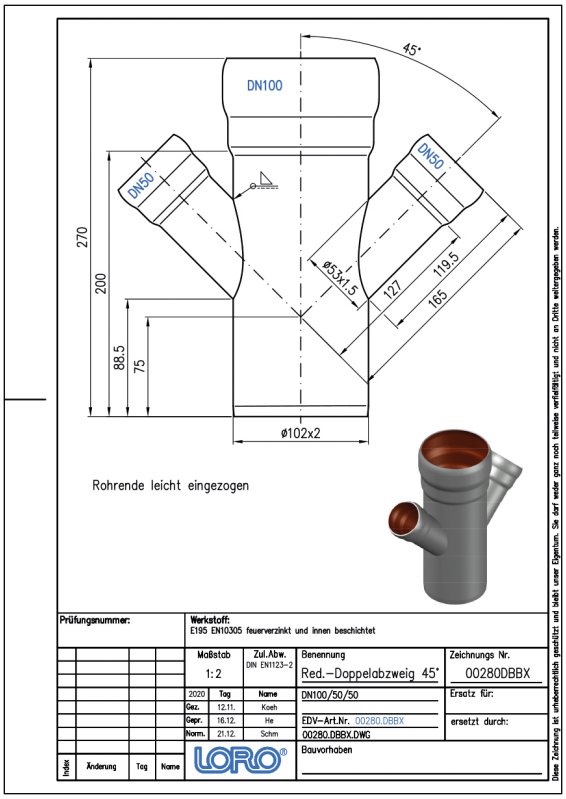

Dados do artigo

Código EAN	**4038088015834**
Classe ETIM	**EC003026**
Diâmetro nominal	**DN 100, DN 50, DN 50**
Comprimento/grau nominal	**45**
Medidas exteriores (AxLxP)	**118 x 275 x 270 mm**
Peso	**1,80 Kg (STK)**
Grupo de produtos	**1**
Número de pauta aduaneira	**73089098**
Material / Cor	**Stahl feuerverzinkt, Silber**

Nota de utilização

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300.Bei LORO-X Abzweigen mit Reduktion steht die erste Nennweite für das gerade Rohrstück und die zweite Nennweite für das kleinere, darin mündende Abzweigrohr.Beispiel DN100/70: Ein DN70 Rohr mündet in ein DN100 Rohr in Fließrichtung.

Transferências

Alles online

Instruções de instalação (PDF)
Homologação (PDF)
BIM 3D (STEP)
Desenho cotado (PDF)
CAD 2D (DXF)
BIM IFC4 (parametrisch)
Brochura (PDF)
CAD 3D (DWG)
BIM 3D (IFC)