


LORO-X REDUCED DOUBLE BRANCH 45 DEGREE DN 100/70/70

LORO-X reduced double branch 45 degrees DN 100/70/70

Descrizione

LORO-X reducing double branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN100/70/70

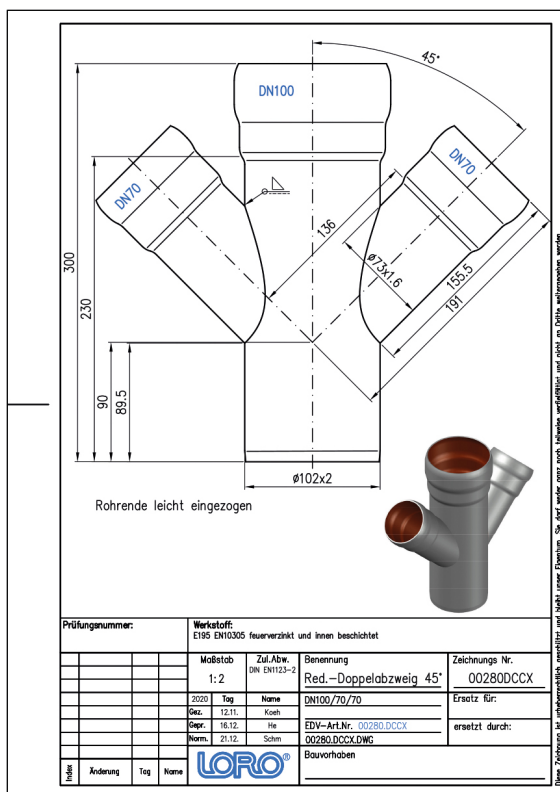

Date articol

Cod EAN	4038088015841
Clasă ETIM	EC003026
Diametru nominal	DN 100, DN 70, DN 70
Lungime/grad nominal	45
Dimensiuni exterioare (îxLxA)	118 x 326 x 300 mm
Greutate	2,30 Kg (STK)
Grupă de produse	1
Număr tarif vamal	73089098
Material / Culoare	Stahl feuerverzinkt, Silber

Notă de utilizare

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300. Bei LORO-X Abzweigen mit Reduktion steht die erste Nennweite für das gerade Rohrstück und die zweite Nennweite für das kleinere, darin mündende Abzweigrohr. Beispiel DN100/70: Ein DN70 Rohr mündet in ein DN100 Rohr in Fließrichtung.

Descărcări



Alles online

[Instrucțiuni de montaj \(PDF\)](#)

[Certificat \(PDF\)](#)

BIM 3D (STEP)

[Desen CAD \(PDF\)](#)

CAD 2D (DXF)

BIM IFC4 (parametrisch)

[Brosură \(PDF\)](#)

CAD 3D (DWG)

BIM 3D (IFC)