LORO-X DOUBLE BRANCH 45 DEGREE DN 100/100/100

LORO-X double branch 45 degrees DN 100/100/100

Description

LORO-X double branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN100/100/100

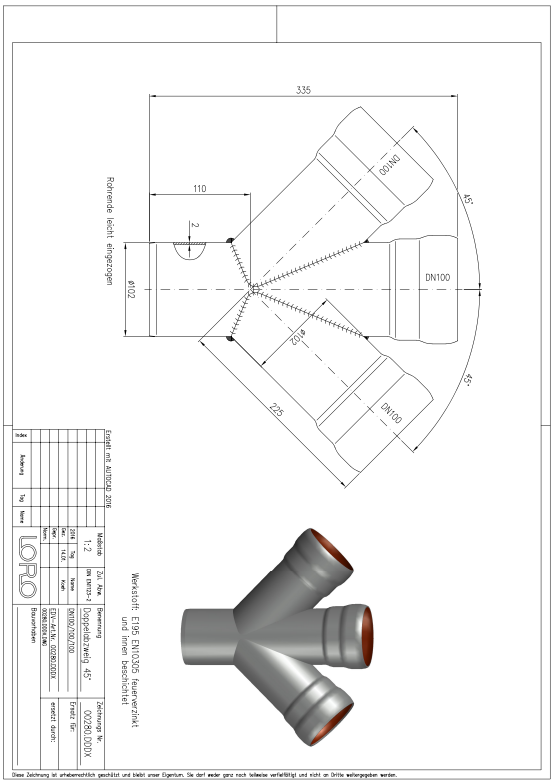

Article information

EAN Code	**4038088015858**
ETIM Class	**EC003026**
Nominal diameter	**DN 100, DN 100, DN 100**
Nominal length/degree	**45**
Outside measurements (HxWxL)	**118 x 275 x 270 mm**
Weight	**4,00 Kg (STK)**
Product group	**1**
Customs tariff number	**73089098**
Material / Color	**Stahl feuerverzinkt, Silber**

Usage note

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300.Bei LORO-X Abzweigen mit Reduktion steht die erste Nennweite für das gerade Rohrstück und die zweite Nennweite für das kleinere, darin mündende Abzweigrohr.Beispiel DN100/70: Ein DN70 Rohr mündet in ein DN100 Rohr in Fließrichtung.

Downloads

Alles online

- Installation (PDF)
- Certificate (PDF)
- BIM 3D (STEP)
- CAD drawing (PDF)
- CAD 2D (DXF)
- BIM IFC4 (parametrisch)
- Brochure (PDF)
- CAD 3D (DWG)
- BIM 3D (IFC)